

Wall mounting socket outlet, switched - housing dimensions 460x276, with electrical interlocking PSK




Product description	
BALS-Prd.-Nr	1676
EAN	4024941016766
product category (PG)	TE wall mounting socket outlet, switched, interlocked
current (A)	125A
number of poles (P99)	5p
number of poles (P)	3p+N+PE
position of earth contact (H)	6 h
voltage (V)	200/346 up to 240/415V

Product description	
frequency (HZ)	50 and 60Hz
protection degree (SA)	IP67
colour code 1 (KF1)	red RAL 3000
Colour of appliance	Hinged lid red RAL 3000, Bayonet ring grey RAL 7035, Housing screws grey RAL 7035, Housing bottom grey RAL 7035, Housing top grey RAL 7035
connection design (AT)	screw terminal as box terminal with Kontex-contact
maximum conductor size (LQ)	70.0 qmm
cable entry (KE)	top entry M50 bottom entry M50 0
Height	502mm
Width	276mm
Depth	460mm
dimension of enclosure (GG)	460x276 mm (HxW)
material of enclosure (GM)	Polyester RAL 7035
contact	The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Additional technical properties	
	Electrically interlocked with pilot contact, cable entry two at top and two at bottom (open), With DIL contactor

Logistics data	
Weight/pcs	9.115 kg / Piece
Packaging	Carton

Logistics data	
Content amount	1 ST
EAN	4024941016766
Length	610 mm
Width	410 mm
Height	430 mm
Weight	10.221 kg
Volume	98,400 ccm

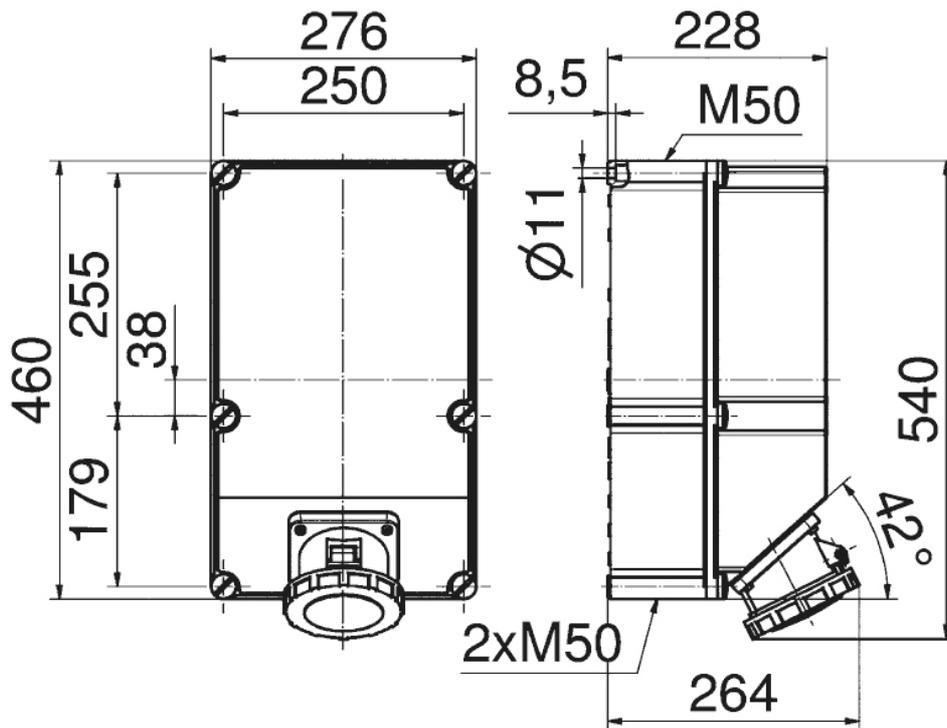

30 MB 104