


FLIR 200.2030.15

Flix 200 Round (FLIRZ 200.05, 1xLED 27W 830/3000K 2970lm 15 °)

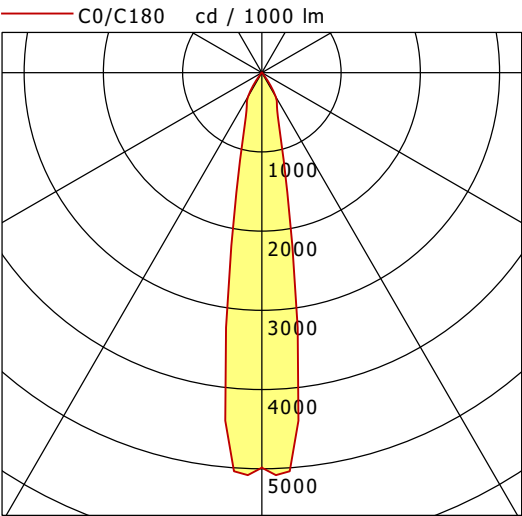

	C0	C90	C180	C270
0°	4987	4987	4987	4987
15°	989	989	989	989
30°	349	349	349	349
45°	15	15	15	15
60°	9	9	9	9
75°	4	4	4	4
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	0.99	1645.7
6.0	1.98	411.4
9.0	2.97	182.9
12.0	3.97	102.9
15.0	4.96	65.8

η		LED
Efficiency		110 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		27 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		19.1
UGR C90/C270		19.1
CIE Flux Codes	97 99 100 100 100	
Ra/CRI		> 80