


PLL 27.410.40.1/DALI

PL 27 (1xLED 22W 840/4000K 1890lm)

— C0/C180 cd / 1000 lm - - - C90/C270

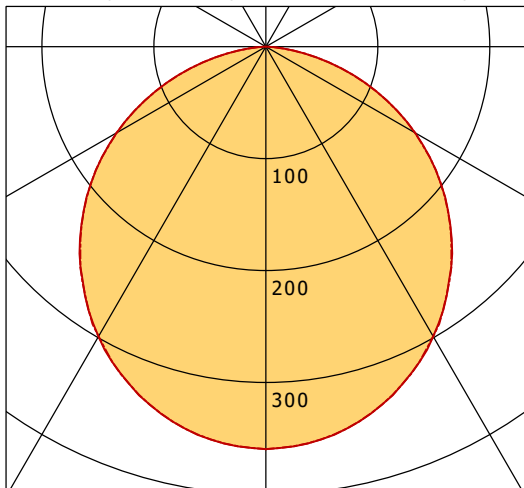

	C0	C90	C180	C270
0°	360	360	360	360
15°	343	343	343	343
30°	299	299	299	299
45°	234	234	234	234
60°	154	154	154	154
75°	64	64	64	64
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	C0-C180 Plane	C90-C270 Plane	Illuminance [lx]
3.0	8.70 8.71		75.5
6.0	17.41 17.41		18.9
9.0	26.11 26.12		8.4
12.0	34.82 34.82		4.7
15.0	43.52 43.53		3.0

η	LED
Efficiency	86 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	22 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.2
UGR C90/C270	22.2
CIE Flux Codes	48 79 96 100 100
Ra/CRI	> 80