

Connector - with screwless terminals, for harsh applications




Product description	
BALS-Prd.-Nr	310508
EAN	4024941205214
product category (PG)	Connector QUICK-CONNECT TE
current (A)	32A
number of poles (P99)	5p
number of poles (P)	3p+N+PE
position of earth contact (H)	5 h
voltage (V)	347/600 up to 400/690V

Product description	
frequency (HZ)	50 and 60Hz
protection degree (SA)	IP44
colour code 1 (KF1)	black RAL 9005
Colour of appliance	Enclosure black RAL 9005, Hinged lid black RAL 9005, Cable gland grey RAL 7035
connection design (AT)	screwless spring terminals as cage clamp with Kontex-contact
maximum conductor size (LQ)	6,0 qmm
cable entry (KE)	Cable gland
Height	199mm
Width	72mm
Depth	99mm
material of enclosure (GM)	Polyamide
contact	The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Logistics data	
Weight/pcs	0.326 kg / Piece
Packaging	Bag
Content amount	1 ST
EAN	4024941205214
Length	99 mm
Width	72 mm

Logistics data	
Height	199 mm
Weight	0.327 kg
Volume	1,418.472 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941838092
Length	325 mm
Width	217 mm
Height	210 mm
Weight	3.466 kg
Volume	13,588.4 ccm

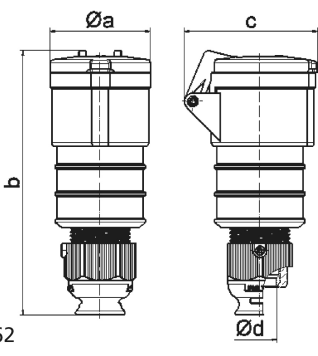

Ampere	16	16	16	32	32	32
Polzahl	3	4	5	3	4	5
a ø	51,0	58,0	65,0	66,5	66,5	72,0
b	156,0	162,0	168,0	195,0	195,0	198,0
c	72,0	78,0	86,0	89,0	89,0	99,0
d ø	18,0	18,0	21,0	23,0	23,0	27,0
Leiter mm ² min	1	1	1	2,5	2,5	2,5
Leiter mm ² max	2,5	2,5	2,5	6	6	6

3 MB 62