

## Cubic-X2

Surface mounted luminaire - Direct/indirect light distribution

Article code: CX2OEE-840M-Q630



Illustrations may only be similar and serve as an orientation.





Cubic-X2. LED. Wall or ceiling mounted luminaire. Luminaire body with distance-spacer. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Direct light distribution and indirect lighting corona. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Switchable. LxWxH (square). L= 630mm. W=630mm. H=75mm.

Medium-power current. 9770lm. 68W. 10,4kg. Binning initial  $\leq$  MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 and 50001:2018 certified.

## Cubic-X2

Surface mounted luminaire - Direct/indirect light distribution

Article code: CX2OEE-840M-Q630

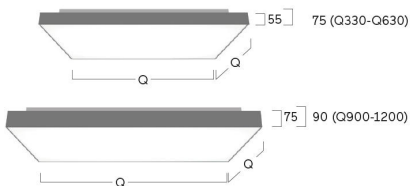

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

|                              |                                    |
|------------------------------|------------------------------------|
| Productname                  | Cubic-X2                           |
| Lamp                         | LED                                |
| Installation Type            | Surface mounted luminaire          |
| Surface finish               | Silver Anodised                    |
| Light characteristics        | Direct/indirect light distribution |
| Colour temperature           | 4000K                              |
| Colour Rendering Index (CRI) | CRI>80                             |
| Optical system               | Opal diffuser                      |
| Control                      | Switchable                         |
| Length L/Diameter D (mm)     | L=630mm                            |
| Width W (mm)                 | W=630mm                            |
| Height H (mm)                | H=75mm                             |
| Current/Power                | Medium-Power                       |
| Luminous Flux                | 9770lm                             |
| Power consumption            | 68W                                |
| Degree of protection         | IP20                               |
| Certification                | Prüfzeichen: ENEC                  |
| LED lifetime                 | L85B10 (tq 25°C) = 50.000h         |
| Photometric code             | 8 40 / 3 3 9                       |
| Photobiological class        | RG0 (EN62471)                      |
| Indoor/Outdoor               | Indoor: ta [ambient] max. 25°C     |
| Weight (kg)                  | 10,4kg                             |

