


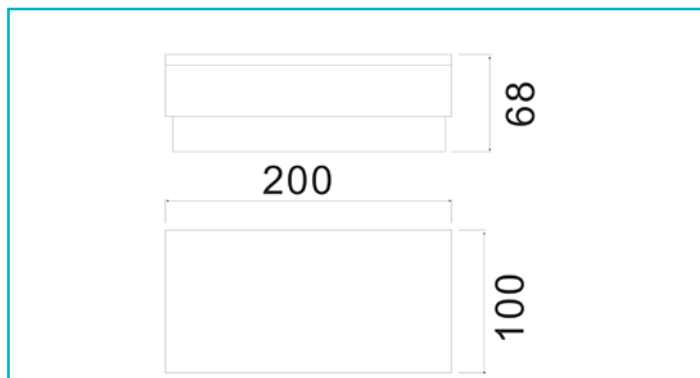

Housing Material	Polycarbonate	Life Time L70 / B50	30000 h
Housing Color	Grey	Switching Cycles	20000
Housing Surface	Transparent	Power Consumption	4 kWh/1000h
Colour of Lens	Transparent	Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class F.
Functions	Walkable - 5 kN		
Protection Class	Protection class II/protective insulation		
Rated Input	3.7 W		
Rated Input Voltage	220-240 V/AC		
Power Supply Unit incl.	Yes		
Connection Type	Open cables		
Primary Cable Length	0.3 m		
Dimmable	No		
Motion Detector	No		
Light Source	LED, Light source changeable		
	TC		
Color Temperature	3000 K		
Colour Rendering Index (Ra)	80		
Rated Luminous Flux	240 lm		
Luminous Efficiency	64.9 lm/W		
Rated Angle of Reflection	120 Degree		
Length	200 mm		
Width	100 mm		
Height	68 mm		
Installation Depth	68 mm		
Product weight	628 g		
Working Temperature	-20 to 45 °C		
Storage Temperature	-20 to 60 °C		
IP Protection Class	IP 67		
IK Protection Class	IK10		
Load Force max.	5 kN		