


Matric-WX

Wall mounted luminaire - Direct/indirect light distribution

Article code: LWXYEE-840H-L1770

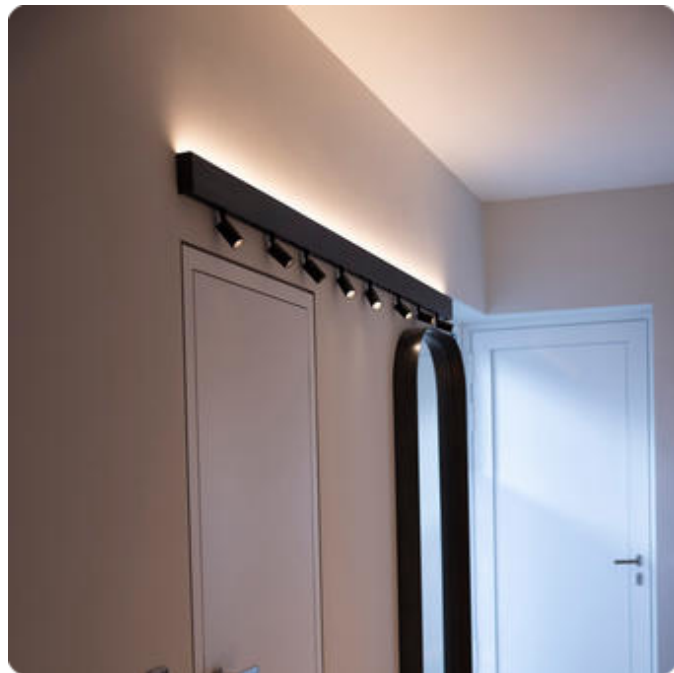

Illustrations may only be similar and serve as an orientation.

Matric-WX. LED. Wall mounted luminaire. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Direct/indirect light distribution. Colour temperatur4000K (Cool White). Colour Rendering Index (CRI): >80. Asymmetrical optics for homogeneous illumination extending into the depth of the room. Switchable. LxWxH (rectangular). L=1770mm. W=41mm. H=100mm. High-power current.

6600lm. 76W. 5,6kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 and 50001:2018 certified.

Matric-WX


Wall mounted luminaire - Direct/indirect light distribution

Article code: LWXYEE-840H-L1770



Customer / Project: _____

Note: _____

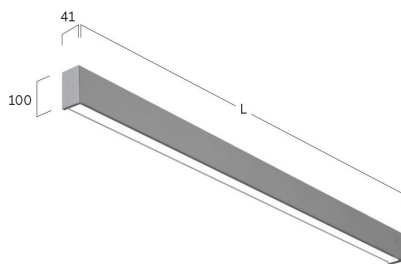

| | |
|------------------------------|------------------------------------|
| Productname | Matric-WX |
| Lamp | LED |
| Installation Type | Wall mounted luminaire |
| Surface finish | Silver Anodised |
| Light characteristics | Direct/indirect light distribution |
| Colour temperature | 4000K |
| Colour Rendering Index (CRI) | CRI>80 |
| Optical system | Asymmetrical |
| Control | Switchable |
| Length L/Diameter D (mm) | L=1770mm |
| Width W (mm) | W=41mm |
| Height H (mm) | H=100mm |
| Current/Power | High-Power |
| Luminous Flux | 6600lm |
| Power consumption | 76W |
| Degree of protection | IP20 |
| Certification | Prüfzeichen: ENEC |
| LED lifetime | L80B10 (tq 25°C) = 50.000h |
| Photometric code | 8 40 / 3 3 9 |
| Photobiological class | RG0 (EN62471) |
| Indoor/Outdoor | Indoor: ta [ambient] max. 25°C |
| Weight (kg) | 5,6kg |

