
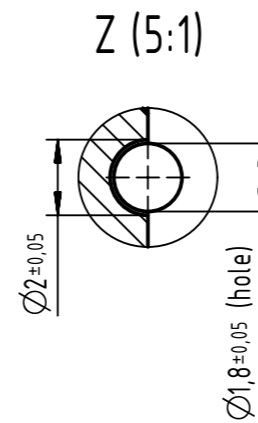


PCB layout, component side

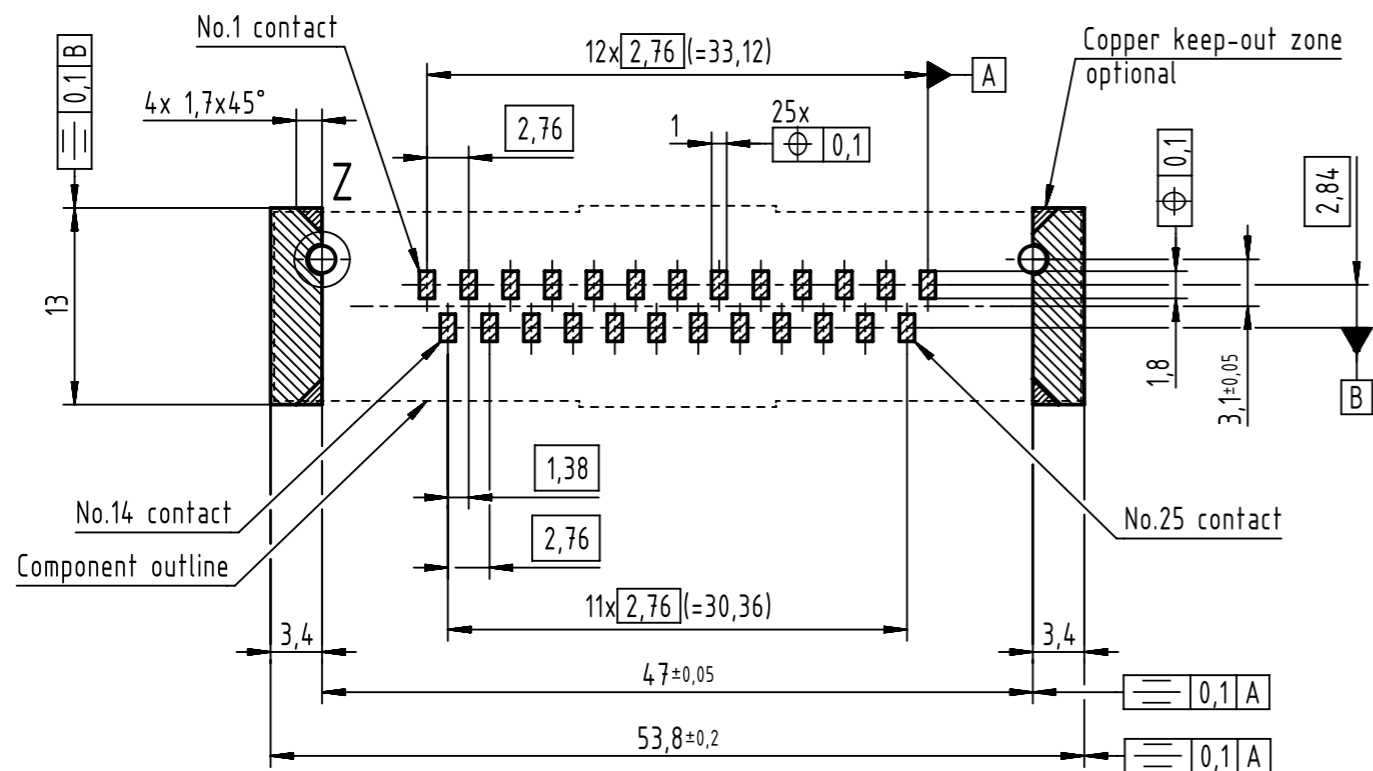

Max. Temperature: 260°C during 10 seconds.
Find further technical information on DS 09550200302.

0955 329 6812 333	2	4-40 UNC	Black insulator	Samples
0955 329 3811 741	1	M3	Black insulator	Reel Packaging: 140 connectors
0955 329 3812 741	1	4-40 UNC		
0955 329 6811 741	2	M3		
0955 329 6812 741	2	4-40 UNC		
0955 329 7811 741	3	M3		
0955 329 7812 741	3	4-40 NUX		
Part number	PL	Nut	Index designation	

	All Dimensions in mm Original Size DIN A3	Scale 2:1	Free size tol.	Ref.
	All rights reserved Department EL PD	Created by ZHUANGJ	Inspected by LUOK	Standardisation HOFFMANN
HARTING Electronics GmbH D-32339 Espelkamp	Title D-Sub str SMT 25-pole male ass with nut and ground pad			Doc-Key / ECM-Nr. 100236628/UGD/001/D 500000139800
	Type TB	Number 0955329X81X	State Final Release	Rev. D Page 1/1