
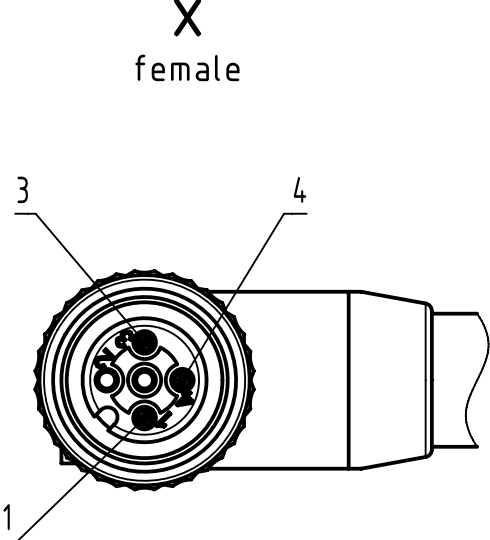



Connector Location A

Connector Location B

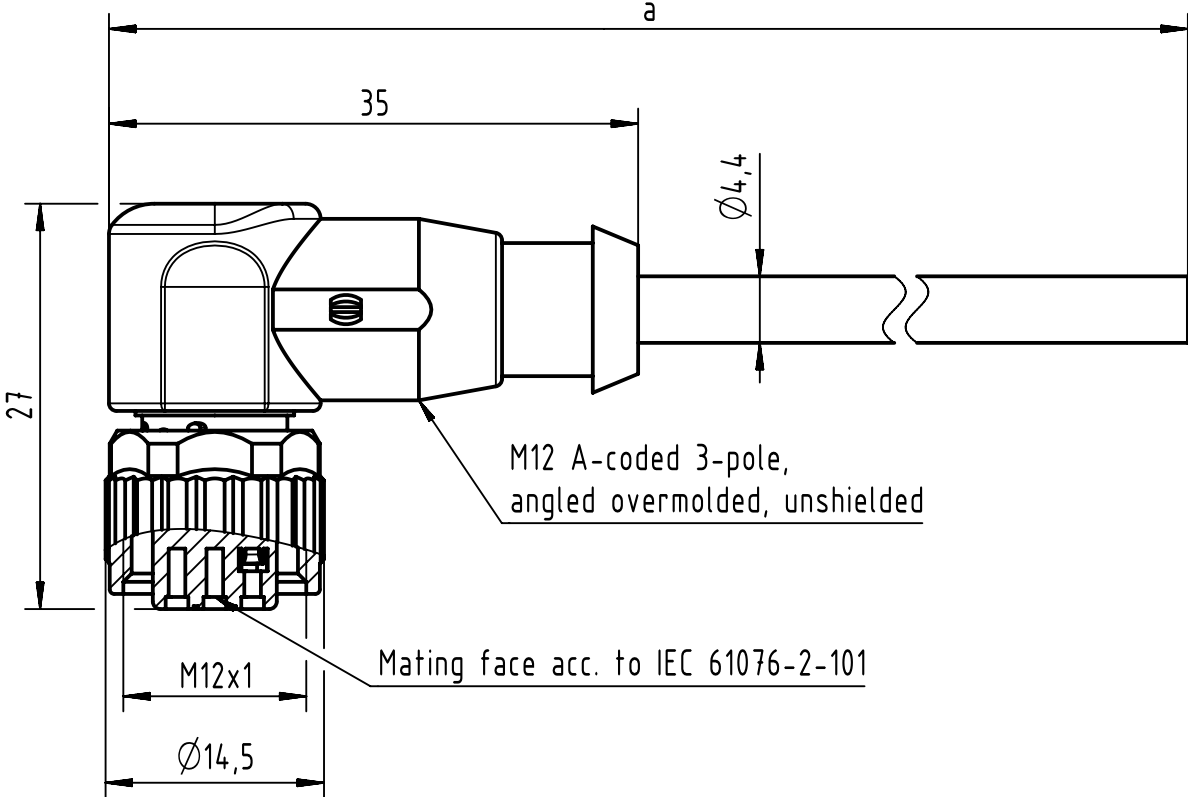

Loading Plan

- 1 brown
- 3 blue
- 4 black

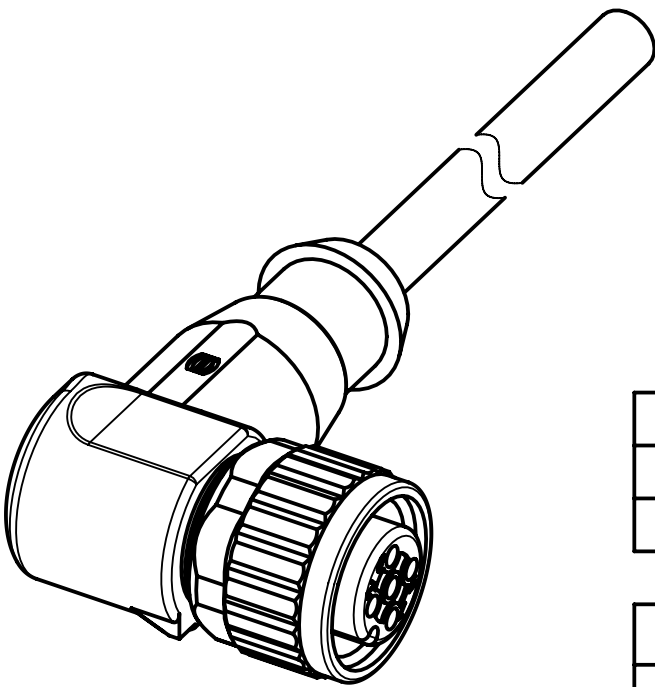

4.0 to 100	±1%
0.1 to 3.9	+0.04
a [m]	Tolerance


length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	0.1	XXX=001
Step	a [m]	XXX

PVC grey, 3x0.34mm ²	21348700383XXX
Type of cable	Part no.

- Protection level: IP67
- Temperature range: -25°C ... +80°C



All rights reserved
Department HCS - RO
HARTING Customised Solutions
D-32339 Espelkamp



All Dimensions in mm

Tech. Character.

Free size tol.

According to production drawing

Created by 402676 Gross

Inspected by COSTEA Costea

Standardisation MUNTEANV Muntean

Date 2023-05-31

State Final Release

Title M12 Cable Assembly A-cod an/- f/-

Type TB

Number 21348700383XXX

Doc-Key / ECM-Nr. 100578809/UGD/009/D 500000242419

Rev. D

Page 1/1