




Very HRC Fuses 6x32 690V - FA Very Fast Acting

Approvals UL recognized E 76491

FROM 0,1 TO 2A

Dimensions

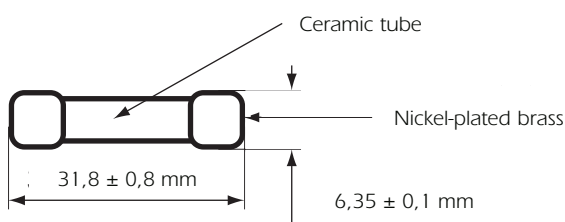

Fuses with filler
Max weight : 2,5 g

Basic Characteristics

Size	Rated Voltage	Rated Current	Breaking Capacity	[I ² t] Pre-arcing	[I ² t] Total clearing at Un	Max voltage drop at In	Designation	Reference Number	Catalog Number
mm	VAC	A		A ² s		V			
6,3 x 32	690	0,100	30 kA 690 V cos φ ≥ 0,2	0,00057	0,0037	2,75	690 V FA 0,100 A 6x32	Q093279	MI6FA69V0,1
		0,125		0,00077	0,005	2,60	690 V FA 0,125 A 6x32	S093281	MI6FA69V0,125
		0,160		0,002	0,014	2	690 V FA 0,160 A 6x32	V086452	MI6FA69V0,160
		0,200		0,0046	0,030	1,7	690 V FA 0,200 A 6x32	T086474	MI6FA69V0,200
		0,250		0,009	0,060	1,55	690 V FA 0,250 A 6x32	V093283	MI6FA69V0,250
		0,315		0,016	0,10	1,45	690 V FA 0,315 A 6x32	X093285	MI6FA69V0,315
		0,400		0,03	0,20	1,4	690 V FA 0,400 A 6x32	W086476	MI6FA69V0,400
		0,500		0,05	0,33	1,4	690 V FA 0,500 A 6x32	D086483	MI6FA69V0,500
		0,630		0,12	0,8	1,15	690 V FA 0,630 A 6x32	Z093287	MI6FA69V0,630
		0,800		0,18	1,2	1,15	690 V FA 0,800 A 6x32	D086437	MI6FA69V0,800
		1,000		0,11	0,48	0,71	690 V FA 1,000 A 6x32	H093295	MI6FA69V1
		1,250		0,17	0,76	0,7	690 V FA 1,250 A 6x32	B093289	MI6FA69V1,25
		1,600		0,39	1,7	0,65	690 V FA 1,600 A 6x32	D093291	MI6FA69V1,6
		2,000		0,81	3,5	0,55	690 V FA 2,000 A 6x32	F093293	MI6FA69V2



Ratings lower than 0,1A : please enquire.

Very HRC Fuses

6x32

690V - FA Very Fast Acting

Time-current characteristics

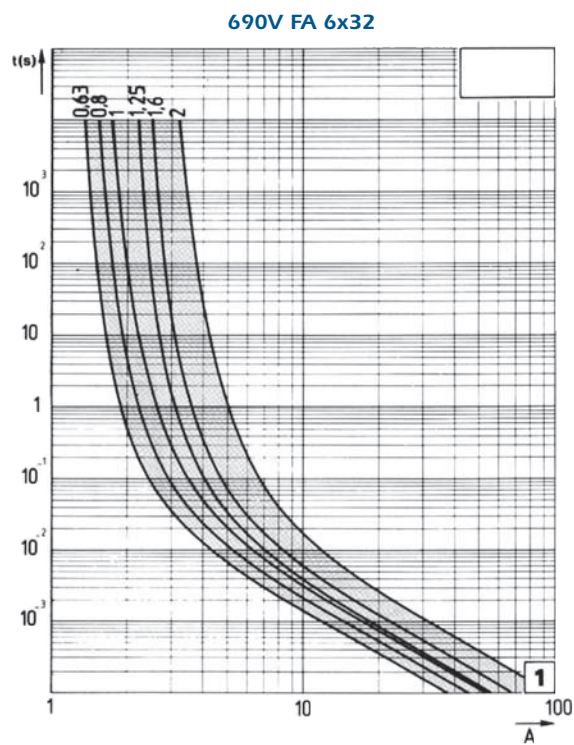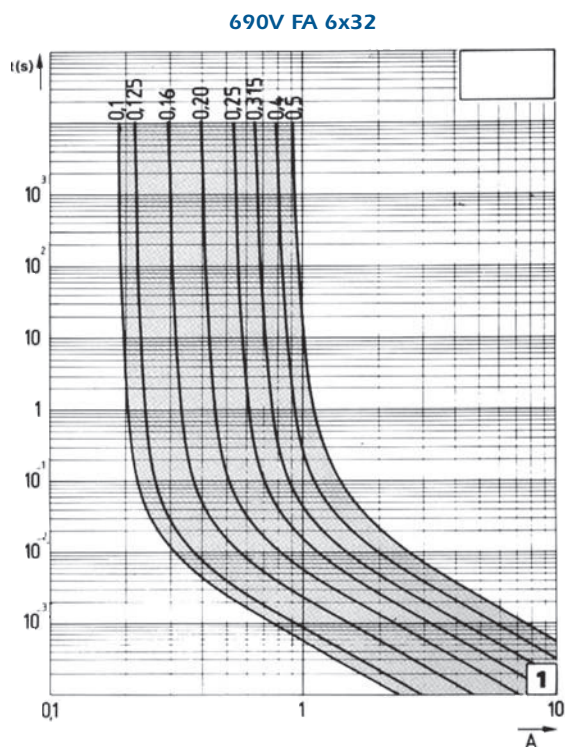

I margin $\pm 12\%$. Actual prearcing time(s). R.M.S. Value of prearcing current (A).

Packaging: Blister per 50 pièces.

For a 500 pieces box packaging consult us.