


LUZ-A14 103.830.60/DALI


LUZ | Surface-Mounted (1xLED 22W 830/3000K 3270lm 60°)

— C0/C180 cd / 1000 lm - - - C90/C270

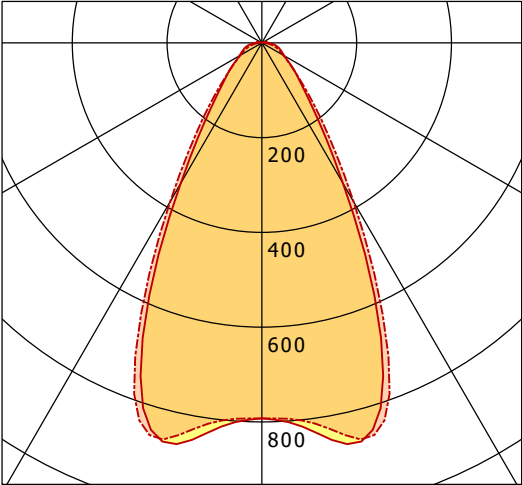

	C0	C90	C180	C270
0°	793	793	793	793
15°	861	864	861	864
30°	342	387	342	387
45°	112	120	112	120
60°	55	53	55	53
75°	36	27	36	27
90°	14	2	14	2
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

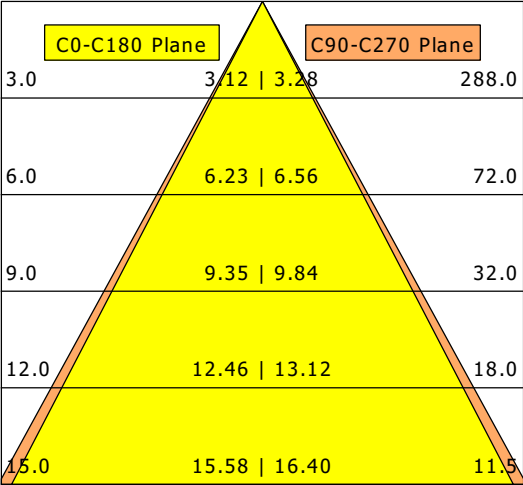

η		LED
Efficiency		149 lm/W
Direct/Indirect		↓ 98% / ↑ 2%
System Power		22 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		20.4
UGR C90/C270		19.9
CIE Flux Codes		76 90 96 98 100
Ra/CRI		> 80