


LUNXXS 401.840.1/DALI


Lunata XXSmall (1xLED 17W 840/4000K 1470lm)

— C0/C180 cd / 1000 lm - - - C90/C270

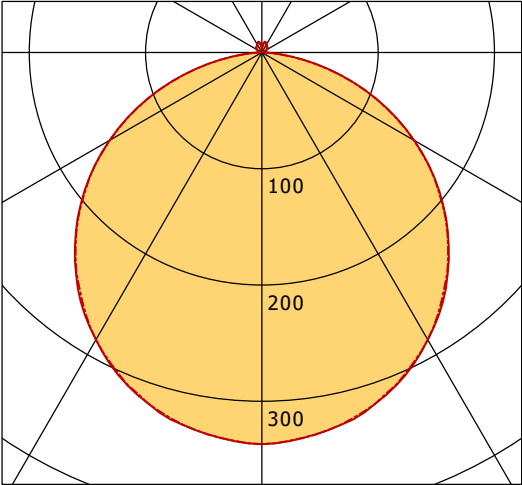

	C0	C90	C180	C270
0°	337	337	337	337
15°	324	322	324	322
30°	285	285	285	285
45°	227	226	227	226
60°	151	151	151	151
75°	65	64	65	64
90°	2	2	2	2
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

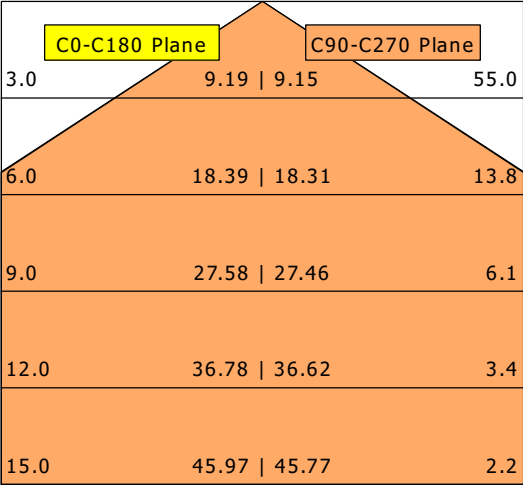

η	LED
Efficiency	86 lm/W
Direct/Indirect	↓ 97% / ↑ 3%
System Power	17 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.6
UGR C90/C270	22.6
CIE Flux Codes	47 79 96 97 100
Ra/CRI	> 80