
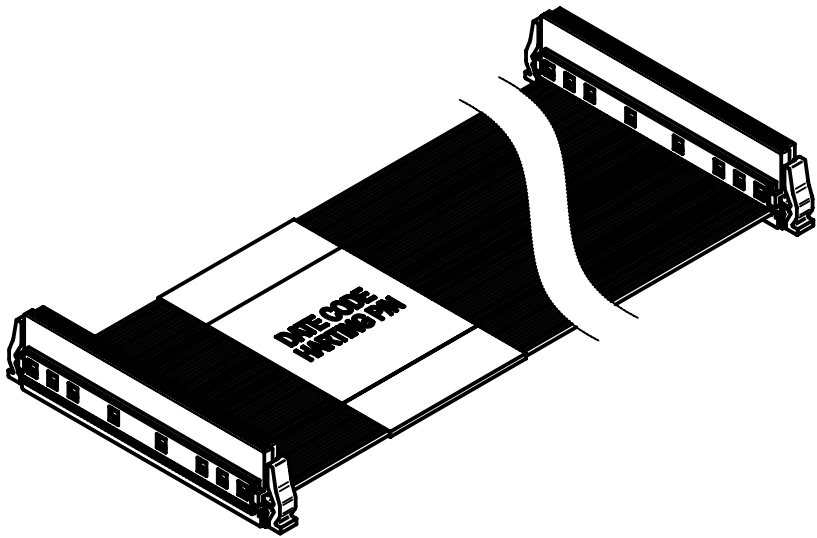


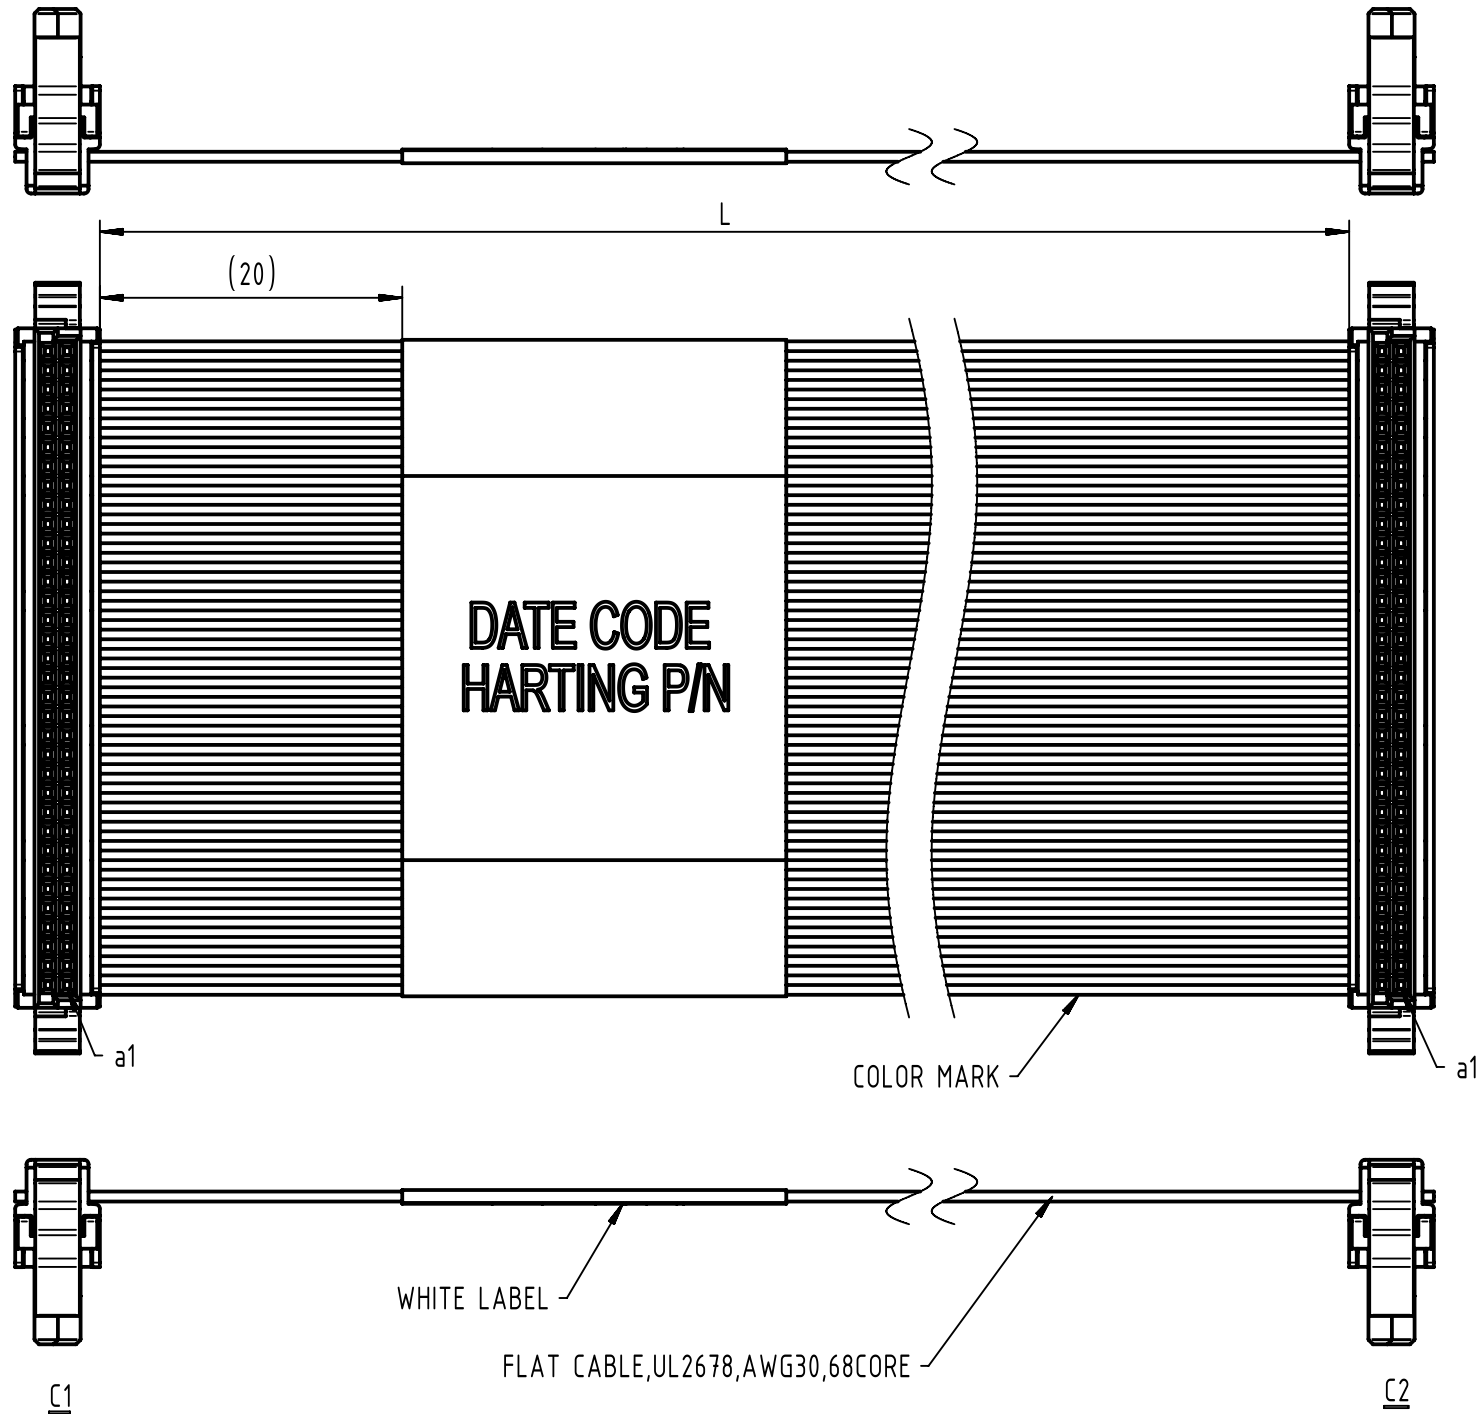

HARTING P/N	Cable length (L)
33152430100148	100±3
33152430200148	200±5
33152430300148	300±5
33152430500148	500±5

HAR-FLEX 68 POLE FEMALE CONNECTOR

HAR-FLEX 68 POLE FEMALE CONNECTOR

NOTES:

- 1.)CABLE MUST BE PERFORMED 100% CONTINUITE TEST AND HI-POT TEST.
- 2.)CABLE OPERATION TEMPERATURE: -20°C TO +105°C
- 3.)CABLE SHOULD BE PACKED BY THE PLASTIC BAG,THEN PUT IT INTO THE CARTON (QTY ACCORDING TO ACTUAL CONDITION) EXPORT CARTON SHOULD BE STICKED THE LABEL WITH P/N AND QTY.
- 4.)WHITE LABEL CONTENT:

DATA CODE
HARTING P/N

WIRING TABLE

C1	WIRE	C2
1	AWG 30	1
2	AWG 30	2
3	AWG 30	3
-	AWG 30	-
67	AWG 30	67
68	AWG 30	68

		All Dimensions in mm Original Size DIN A3		Scale 2:1		Free size tol. \\		Ref. \						
				Sub. \										
	All rights reserved			Created by LINI Lin		Inspected by QINL Qin		Standardisation QINL Qin		Date 2019-08-03		State Final Release		
	Department HCS - CN			Title Har-Flex 68 Pole,Dul-end,W/O SR,L=XX MM								Doc-Key / ECM-Nr. 100598223/UGD/000/A 500000156101		
HARTING Customised Solutions D-32339 Espelkamp												Type TB		Number 33150031