


ORYO-T 201.927.L06/CAS

Oryo 200 | Track-Mounted (1xLED 20W 927/2700K 510lm)

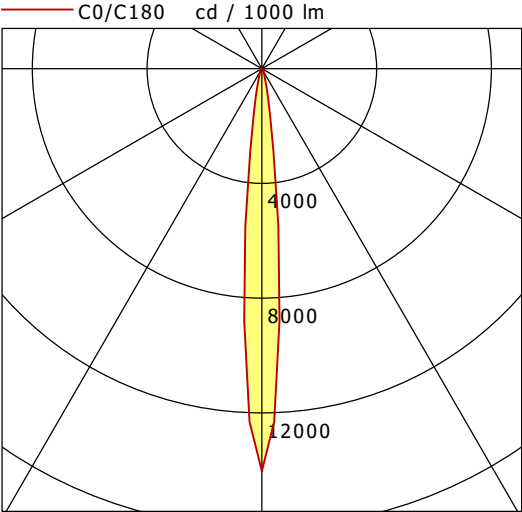

	C0	C90	C180	C270
0°	14031	14031	14031	14031
15°	557	557	557	557
30°	111	111	111	111
45°	87	87	87	87
60°	59	59	59	59
75°	19	19	19	19
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	0.53	795.1
6.0	1.06	198.8
9.0	1.59	88.3
12.0	2.12	49.7
15.0	2.65	31.8

η		LED
Efficiency		26 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		20 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		22.0
UGR C90/C270		22.0
CIE Flux Codes		81 93 99 100 100
Ra/CRI		>90