

## Wall mounting socket outlet, switched - 7 poles, housing dimensions 225x118




| Product description           |                                         |
|-------------------------------|-----------------------------------------|
| BALS-Prd.-Nr                  | 16374                                   |
| EAN                           | 4024941163743                           |
| product category (PG)         | TE wall mounting socket outlet switched |
| current (A)                   | 16A                                     |
| number of poles (P99)         | 7p                                      |
| number of poles (P)           | 6p+PE                                   |
| position of earth contact (H) | 6 h                                     |
| voltage (V)                   | 400V                                    |

| Product description         |                                                                                                                                            |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| frequency (HZ)              | 50 and 60Hz                                                                                                                                |
| protection degree (SA)      | IP44                                                                                                                                       |
| colour code 1 (KF1)         | red RAL 3000                                                                                                                               |
| Colour of appliance         | Hinged lid red RAL 3000, Housing screws grey RAL 7035, Housing bottom grey RAL 7035, Housing top grey RAL 7035, Control knob grey RAL 7035 |
| connection design (AT)      | with screw terminal                                                                                                                        |
| maximum conductor size (LQ) | 4,0 qmm                                                                                                                                    |
| cable entry (KE)            | top entry M25/M25 bottom entry M25                                                                                                         |
| Height                      | 243mm                                                                                                                                      |
| Width                       | 118mm                                                                                                                                      |
| Depth                       | 137mm                                                                                                                                      |
| dimension of enclosure (GG) | 225x118 mm (HxW)                                                                                                                           |
| material of enclosure (GM)  | Polycarbonate                                                                                                                              |
| contact                     | The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated                                   |

| Additional technical properties |                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------|
|                                 | The cable entry is one at top open, one at top is closed, and two at bottom are closed |
|                                 | In 0-position lockable for 3 padlocks with bow diameter up to 7 mm                     |

| Logistics data |                |
|----------------|----------------|
| Weight/pcs     | 0.0 kg / Piece |

| Logistics data |               |
|----------------|---------------|
| Packaging      | Carton        |
| Content amount | 1 ST          |
| EAN            | 4024941163743 |
| Length         | 275 mm        |
| Width          | 175 mm        |
| Height         | 137 mm        |
| Weight         | 0.125 kg      |
| Volume         | 5,737.5 ccm   |

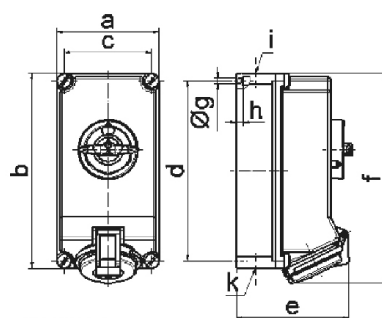

12 MB 84

| Ampere  | 16      | 32      |  |  |  |  |  |
|---------|---------|---------|--|--|--|--|--|
| Polzahl | 7       | 7       |  |  |  |  |  |
| a       | 118,0   | 118,0   |  |  |  |  |  |
| b       | 225,0   | 225,0   |  |  |  |  |  |
| c       | 101,0   | 101,0   |  |  |  |  |  |
| d       | 208,0   | 208,0   |  |  |  |  |  |
| e       | 134,0   | 144,0   |  |  |  |  |  |
| f       | 242,0   | 251,0   |  |  |  |  |  |
| g ø     | 6,5     | 6,5     |  |  |  |  |  |
| h       | 8,0     | 8,0     |  |  |  |  |  |
| i       | 2 x M25 | 2 x M25 |  |  |  |  |  |
| k       | 2 x M25 | 2 x M25 |  |  |  |  |  |
|         |         |         |  |  |  |  |  |
|         |         |         |  |  |  |  |  |
|         |         |         |  |  |  |  |  |