



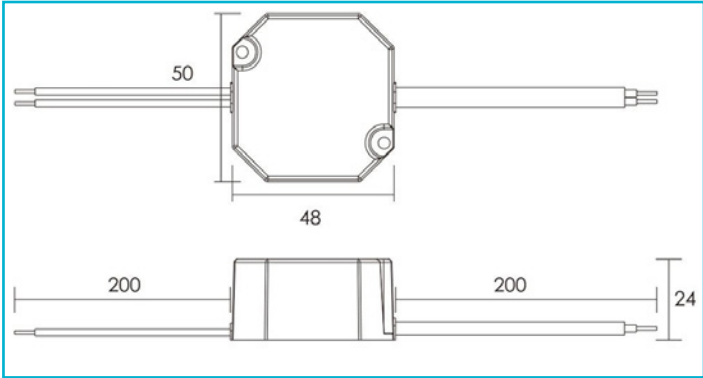

- Special features**
- Flicker-free
 - Secured against short circuits and overloads

Housing Material	Plastic
Housing Color	Black
Operating Mode	Constant voltage
Protection Class	Protection class II/protective insulation
Power	12 W
Output Voltage	24 V/DC
Output Current	0-500 mA
Power Factor	0.90
Connection Type	Open cables
Primary Connection	With free strand / conductor ends
Secondary Connection	Open cables
Number of Circuit Breaker B10A max.	17
Number of Circuit Breaker B16A max.	27
Number of Circuit Breaker C10A max.	36
Number of Circuit Breaker C16A max.	58
Inrush Current max.	15 A / 200 µs
Capacitive Load	622 µF
Reference Point Tc	85 °C
Working Temperature	-20 to 50 °C
Storage Temperature	-20 to 70 °C
IP Protection Class	IP 65
Life Time	30000 h
Length	50 mm
Width	48 mm
Height	24 mm
Product weight	85 g

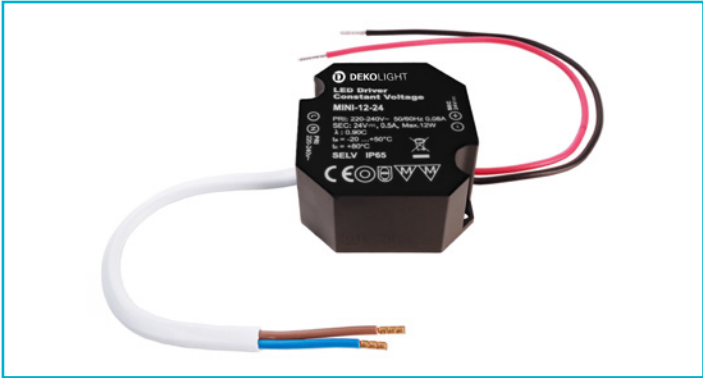