
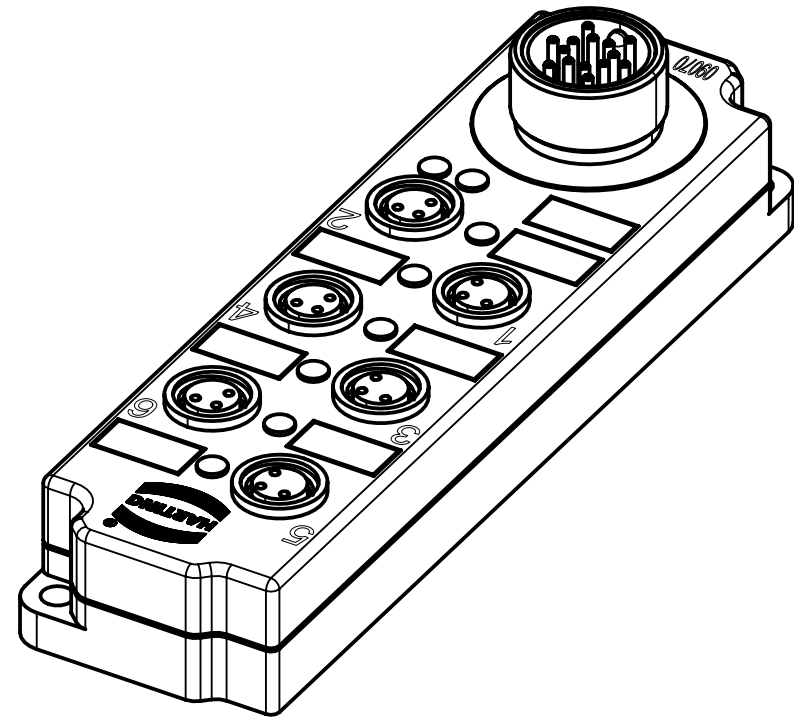


Loading plan

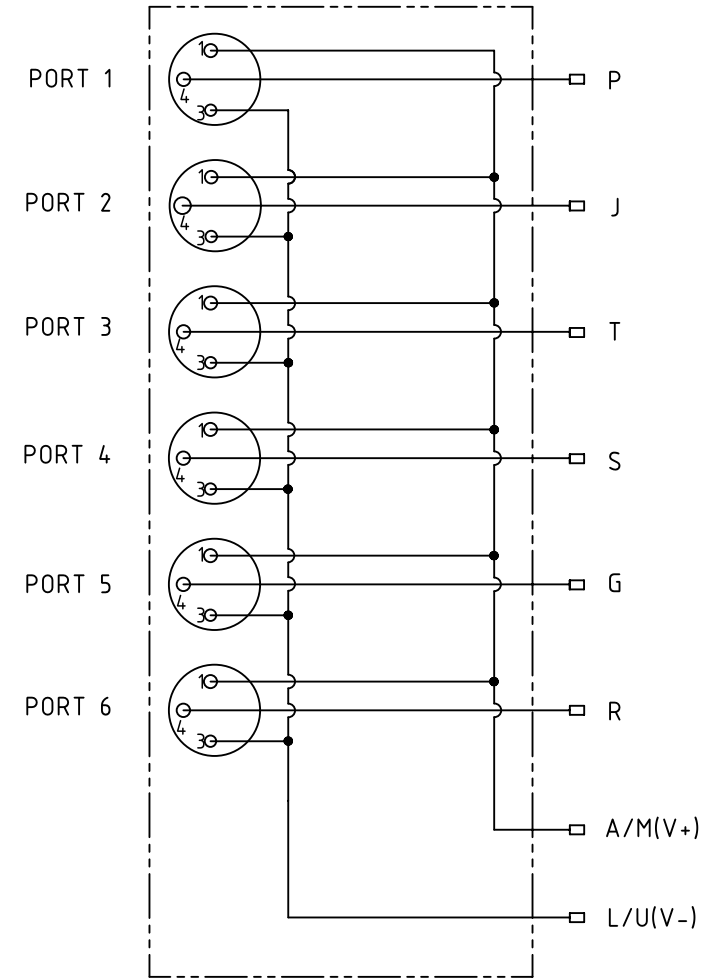

- Protection level: IP67
 - Temperature range: -25°C ... +85°C

| | | | | | | | | | | | | |
|--|---------------------|--|---|--|---------------------------|--|----------------------------------|--|--|--|---------------------|----------|
| | All rights reserved | | Created by COSTEA Costea | | Inspected by 402676 Gross | | Standardisation MUNTEANV Muntean | | Date 2020-07-17 | | State Final Release | |
| | Department HCS - RO | | Title har-SAB M8/6/3p M16 w/o LED | | Type TB | | Number 09070041010000 | | Doc-Key / ECM-Nr. 100905036/UGD/000/A 500000176715 | | Rev. A | Page 1/1 |
| HARTING Customised Solutions D-32339 Espelkamp | | | All Dimensions in mm Tech. Character. Free size tol. According to production drawing | | | | | | | | | |