


The copying, distribution and utilization of this document as well as the communication of the contents to others without expressed authorization is prohibited according to §18 UWG German Law. Offenders will be held liable for the payment of damages according to §19 UWG German Law. All rights reserved, in particular the right to carry out patent, utility model or ornamental design registrations.




Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts gem. §18 UWG verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz (§19 UWG). Alle Rechte vorbehalten, insbesondere das Recht, Patent-, Gebrauchsmuster- oder Geschmacksmusteranmeldungen durchzuführen. PHENIX CONTACT Connector Technology GmbH Heisenbergstrasse 1 D-71083 Herrenberg

Mechanical data (according to IEC 61076-2-101)	
Locking thread	M12x1 STANDARD
Material	
Flange housing	GD-Zn, nickel-plated
Sealing gasket	-
Nut	brass, nickel-plated
Temperature range	-40 °C to +85 °C

further information:
- see installation recommendation
SACC-BP-F-M12/M15-6-THR

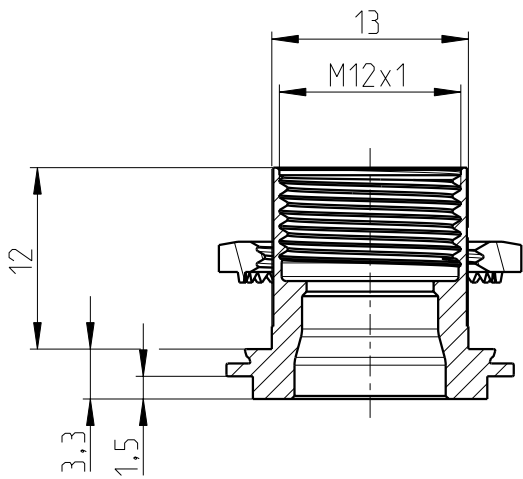

nut M15x1
enclosed separately

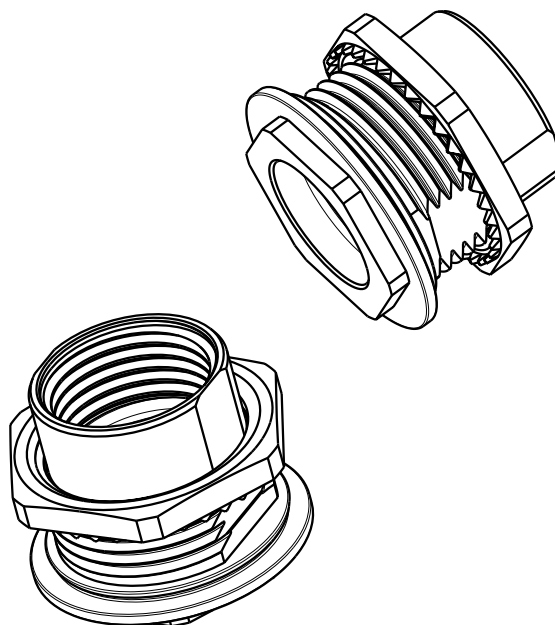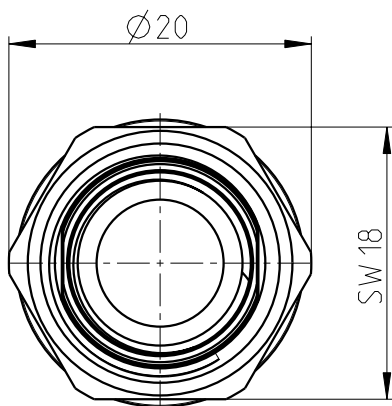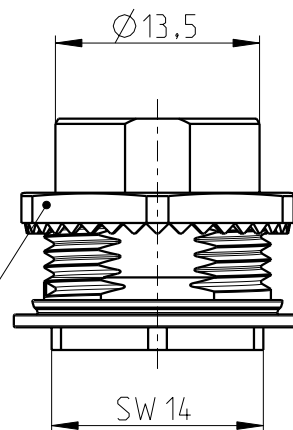

general tolerance acc. to DIN ISO 2768-c			technical changes reserved		Index 0 / 2019-08-21		scale: 2:1		
	date	name	Series DSIV M12 Standard housing screw connection female SW 14 / screw connection					page: 1 of: 1	
design	2019-08-21	Epple							
chk.									
			drawing-no.:	1149834		doc.-no.:	097034757		
			order-no.:	1149834					
			article designation:	SACC-BP-F-M12/M15-6-THR WS EMV					