

## Basic-X5

Surface mounted luminaire - Direct/indirect light distribution

Article code: BX5ASL-830H-D500



Illustrations may only be similar and serve as an orientation.

Basic-X5. LED. Wall or ceiling mounted luminaire. Luminaire body with distance-spacer. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct light distribution and indirect lighting corona. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR<=19. Dimmable DALI. DxH (round). D=500mm. H=38



+30mm. High-power current. 4769lm. 40W. 5,4kg. Binning initial <= MacAdam 3. IP40. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 and 50001:2018 certified.

# lightnet

## Basic-X5

Surface mounted luminaire - Direct/indirect light distribution

Article code: BX5ASL-830H-D500

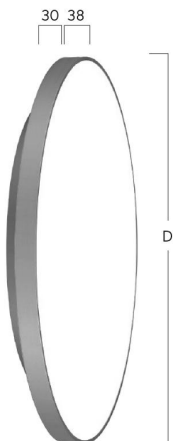

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

|                              |                                    |
|------------------------------|------------------------------------|
| Productname                  | Basic-X5                           |
| Lamp                         | LED                                |
| Installation Type            | Surface mounted luminaire          |
| Surface finish               | Radiant Silver                     |
| Light characteristics        | Direct/indirect light distribution |
| Colour temperature           | 3000K                              |
| Colour Rendering Index (CRI) | CRI>80                             |
| Optical system               | Microprismatic screen              |
| Control                      | Dimmable (DALI)                    |
| Length L/Diameter D (mm)     | D=500mm                            |
| Height H (mm)                | H=38+30mm                          |
| Current/Power                | High-Power                         |
| Luminous Flux                | 4769lm                             |
| Power consumption            | 40W                                |
| Degree of protection         | IP40                               |
| Certification                | Prüfzeichen: ENEC                  |
| LED lifetime                 | L80B10 (tq 25°C) = 50.000h         |
| UGR                          | UGR<=19                            |
| Photometric code             | 8 30 / 3 3 9                       |
| Photobiological class        | RG0 (EN62471)                      |
| Indoor/Outdoor               | Indoor: ta [ambient] max. 25°C     |
| Weight (kg)                  | 5,4kg                              |

