



VTFM-R 101.827/DALI

Vale-Tu Flat Medium | Recessed (1xLED 20W 827/2700K 1710lm)

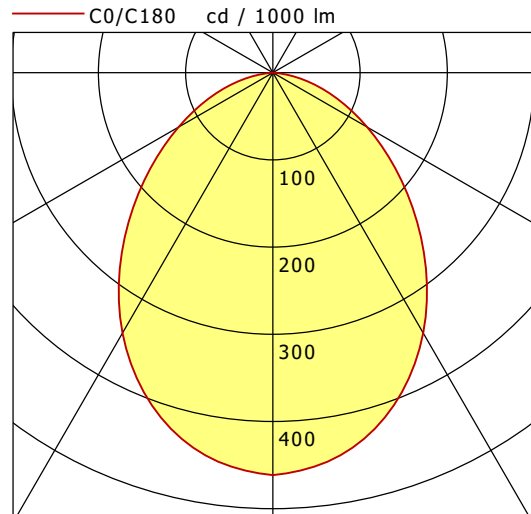

| | C0 | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0° | 462 | 462 | 462 | 462 |
| 15° | 429 | 429 | 429 | 429 |
| 30° | 345 | 345 | 345 | 345 |
| 45° | 230 | 230 | 230 | 230 |
| 60° | 125 | 125 | 125 | 125 |
| 75° | 45 | 45 | 45 | 45 |
| 90° | 0 | 0 | 0 | 0 |
| cd / 1000 lm | | | | |

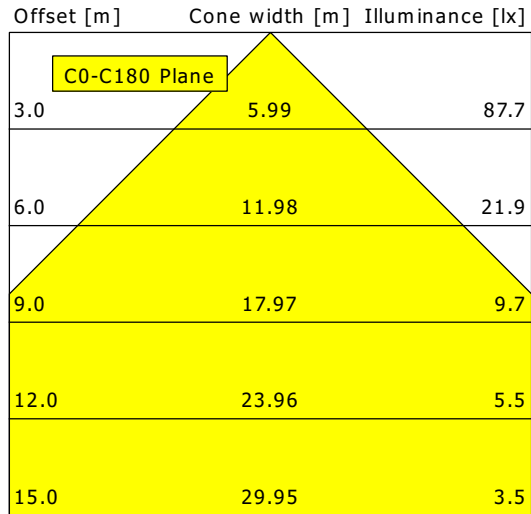

| | |
|--------------------|------------------|
| η | LED |
| Efficiency | 86 lm/W |
| Direct/Indirect | ↓ 100% / ↑ 0% |
| System Power | 20 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 26.3 |
| UGR C90/C270 | 26.3 |
| CIE Flux Codes | 56 85 98 100 100 |
| Ra/CRI | >80 |