

Ringo Star-A5

Surface mounted luminaire - Direct light distribution

Article code: RA5LWE-830E-D200-B-BP



Illustrations may only be similar and serve as an orientation.



Ringo Star-A5. LED. Surface mounted luminaire for walls or ceilings. Luminaire body made of aluminium profile with 40mm profile width. Surface finish Snow White. Direct only light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Lens Louvre: precision lenses with louvre for wide and symmetrical light distribution. High glare limitation, compatible for office applications. UGR<=19. Reflector: Jet Black. Blind Plate.

Switchable. DxHxW (round). D=200mm. W=40mm. H=40mm. Low-power current. 1468lm. 13W. 1,5kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,2%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L90B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 and 50001:2018 certified.

Ringo Star-A5

Surface mounted luminaire - Direct light distribution

Article code: RA5LWE-830E-D200-B-BP

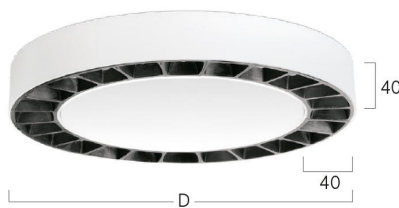

Customer / Project: _____

Note: _____

| | |
|------------------------------|--------------------------------|
| Productname | Ringo Star-A5 |
| Lamp | LED |
| Installation Type | Surface mounted luminaire |
| Surface finish | Snow White |
| Light characteristics | Direct light distribution |
| Colour temperature | 3000K |
| Colour Rendering Index (CRI) | CRI>80 |
| Optical system | Lens Louvre |
| Reflector Colour Inside | Reflector: Jet Black |
| Central Module | Blind Plate |
| Control | Switchable |
| Length L/Diameter D (mm) | D=200mm |
| Width W (mm) | W=40mm |
| Height H (mm) | H=40mm |
| Current/Power | Low-Power |
| Luminous Flux | 1468lm |
| Power consumption | 13W |
| Degree of protection | IP20 |
| LED lifetime | L90B10 (tq 25°C) = 50.000h |
| UGR | UGR<=19 |
| Photometric code | 8 30 / 3 3 9 |
| Photobiological class | RG0 (EN62471) |
| Indoor/Outdoor | Indoor: ta [ambient] max. 25°C |
| Weight (kg) | 1,5kg |

