



SCOUT 205.940.50.2/DALI-ST

Scout Next (1xLED 46W 940/4000K 5030lm 50°)

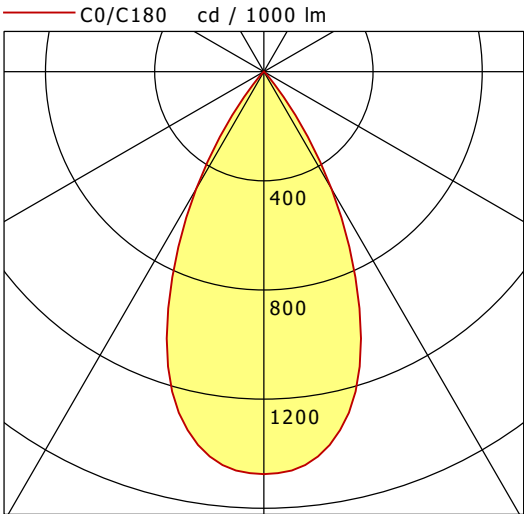

	C0	C90	C180	C270
0°	1475	1475	1475	1475
15°	1256	1256	1256	1256
30°	496	496	496	496
45°	12	12	12	12
60°	1	1	1	1
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

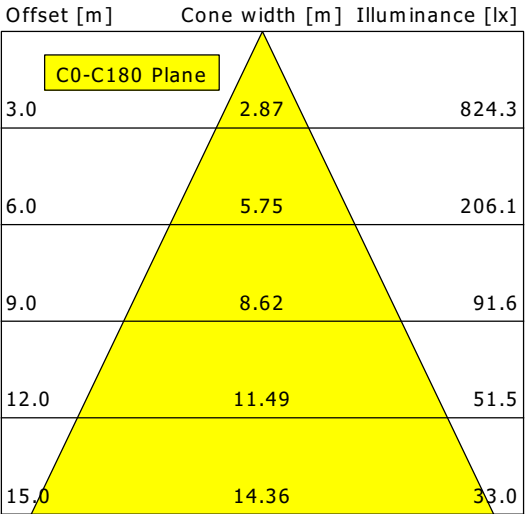

η		LED
Efficiency		109 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		46 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		21.7
UGR C90/C270		21.7
CIE Flux Codes	99 100 100 100 100	
Ra/CRI		>90