

TECHNISCHE DATEN:

Aufbau

Hutmutter	Polyamid PA6 V-2
Dichteinsatz	TPE TPS
Zwischenstutzen	Polyamid PA6 V-2
Anschlussgewinde	metrisch, nach EN 60423

Eigenschaften

- Dichteinsatz ohne Bohrung
- Einsatz als Reserve-Kabelverschraubung oder als Schutz gegen Staub und Feuchtigkeit
- Dichteinsatz eignet sich zum Bohren von individuellen Durchgangslöchern

Temperaturbereich	-20 °C / +100 °C (dynamisch) -40 °C (statisch, kurzzeitig)
-------------------	---

Schutzart	IP65
-----------	------

Hinweis	Dichteinsätze - siehe unter Zubehör - Serie WJ-DM xx STO
---------	--

TECHNICAL DATA:

Configuration

Dome nut	Polyamide PA6 V-2
Sealing insert	TPE TPS
Gland body	Polyamide PA6 V-2
Connecting thread	metric, as per EN 60423


Properties

- sealing insert without bore hole
- installation as spare cable gland or protection against dust and humidity
- sealing insert is suitable to bore individual clearance holes

Temperature range	-20 °C / +100 °C (dynamic) -40 °C (static, short term)
-------------------	---

Protection grade	IP65
------------------	------

Comment	sealing inserts - see under accessories - series WJ-DM xx STO
---------	---

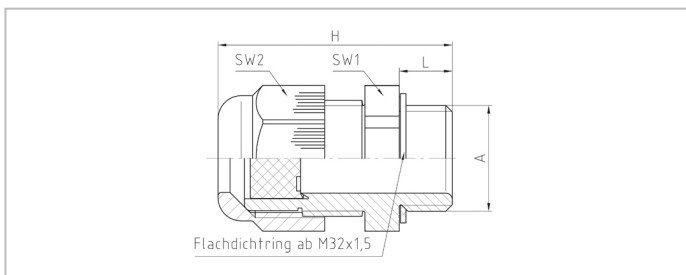

Merkmale

Characteristics

Anschlussgewinde Standardlänge

Connecting thread standard length

A	L mm	SW1 mm	SW2 mm	H mm	📦	RAL 7001 silbergrau silver grey			RAL 7035 lichtgrau light grey			RAL 9005 tiefschwarz jet black		
						Art.-Nr. / Part No.	Art.-Nr. / Part No.	Art.-Nr. / Part No.	Art.-Nr. / Part No.	Art.-Nr. / Part No.	Art.-Nr. / Part No.	Art.-Nr. / Part No.		
M12x1,5	8	15	15	31	100	50.612 PA/STO	50.612PA7035/STO	50.612PA/STO	50.612PA7035/STO	50.612PA/STO	50.612PA7035/STO	50.612PA/SW/STO	50.612PA/SW/STO	50.612PA/SW/STO
M16x1,5	8	20	20	35,5	100	50.616 PA/STO	50.616PA7035/STO	50.616PA/STO	50.616PA7035/STO	50.616PA/STO	50.616PA7035/STO	50.616PA/SW/STO	50.616PA/SW/STO	50.616PA/SW/STO
M20x1,5	8	24	24	36	100	50.620 PA/STO	50.620PA7035/STO	50.620PA/STO	50.620PA7035/STO	50.620PA/STO	50.620PA7035/STO	50.620PA/SW/STO	50.620PA/SW/STO	50.620PA/SW/STO
M25x1,5	8	29	29	43	50	50.625 PA/STO	50.625PA7035/STO	50.625PA/STO	50.625PA7035/STO	50.625PA/STO	50.625PA7035/STO	50.625PA/SW/STO	50.625PA/SW/STO	50.625PA/SW/STO
M32x1,5	10	36	36	50	25	50.632 PA/STO	50.632PA7035/STO	50.632PA/STO	50.632PA7035/STO	50.632PA/STO	50.632PA7035/STO	50.632PA/SW/STO	50.632PA/SW/STO	50.632PA/SW/STO
M40x1,5	10	46	46	51	10	50.640 PA/STO	50.640PA7035/STO	50.640PA/STO	50.640PA7035/STO	50.640PA/STO	50.640PA7035/STO	50.640PA/SW/STO	50.640PA/SW/STO	50.640PA/SW/STO