


Art. no. 950008

Pendant lamp Lautaro 600/60 Down Opal M3, 37 W,  
DALI, 4000 K, white

 **DEKOLIGHT**

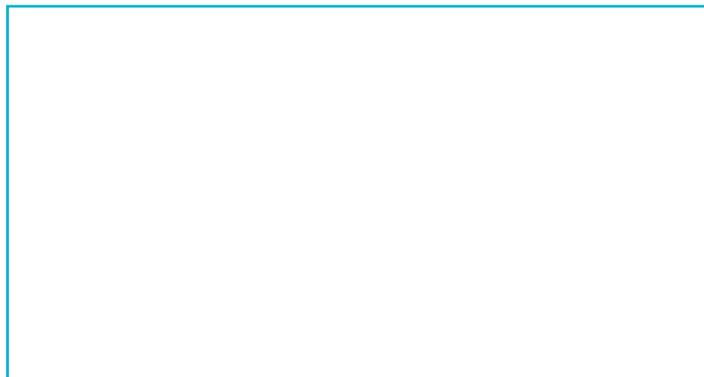

<b>Housing Material</b>	Aluminium, Steel	<b>Life Time L70 / B50</b>	180000 h
<b>Housing Color</b>	White	<b>Life Time L80 / B10</b>	120000 h
<b>Material of Lens</b>	Polycarbonate - PC	<b>Life Time L80 / B50</b>	130000 h
<b>Surface Structure of Lens</b>	Opal	<b>Life Time L90 / B10</b>	50000 h
		<b>Life Time L90 / B20</b>	60000 h
<b>Protection Class</b>	Protection class I/protective grounding	<b>Switching Cycles</b>	100000 PCS
<b>Rated Input</b>	37 W	<b>Power Consumption</b>	37 kWh/1000h
<b>Rated Power Consumption Standby</b>	0.3 W	<b>Energy Efficiency Class Lightsource</b>	This product contains a light source of energy efficiency class E.
<b>Rated Input Voltage</b>	198-264 V/AC		
<b>Dimmable</b>	Yes		
<b>Control</b>	DALI 2 / DT6, Push-Dim		
<b>Light Source</b>	LED, Light source changeable TC		
<b>Color Temperature</b>	4000 K		
<b>Colour Consistency</b>	3 SDCM		
<b>Colour consistency light source</b>	2 SDCM		
<b>CRI (Ra)</b>	90		
<b>Rated Luminous Flux</b>	4670 lm		
<b>Rated Angle of Reflection</b>	90 Degree		
<b>UGR</b>	22		
<b>Light Exit Surfaces</b>	1 PCS		
<b>Light characteristics</b>	Direct		
<b>Light direction</b>	Below		
<b>Height</b>	60 mm		
<b>Diameter</b>	600 mm		
<b>Pendulum Length max.</b>	3000 mm		
<b>Working Temperature</b>	-20 to 50 °C		
<b>Storage Temperature</b>	-40 to 80 °C		
<b>IP Protection Class Lamp</b>	IP 20		
<b>IK Protection Class</b>	IK05		