


- Protection level: IP67  
 - Temperature range: -25°C ... +85°C

Loading plan

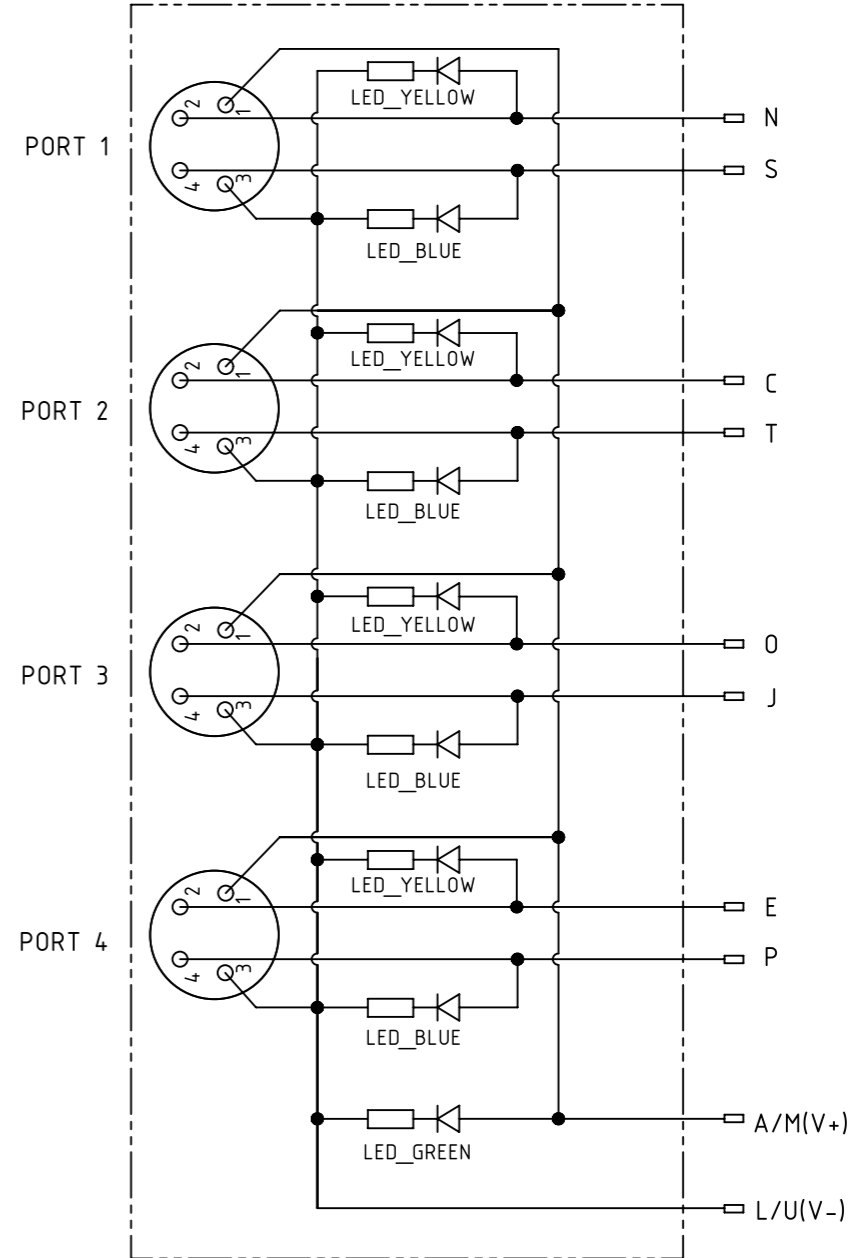

remark:  
 • channel B working: YE  
 • channel A working: BU  
 • twin-channel working: WH

	All rights reserved	Created by STOCHECIC Stocheici	Inspected by COSTEA Costea	Standardisation MUNTEANV Muntean	Date 2019-06-19	State Final Release
	Department HCS - RO	Title har-SAB M8/4/4p M16/14p		Doc-Key / ECM-Nr. 100838735/UGD/001/A 500000153833		
HARTING Customised Solutions D-32339 Espelkamp		Type TB	Number 090700401101		Rev. A	Page 1/1