
Surface-mounted ceiling light Quadrata II 296x296 mm, 16 W, 3000 K, Grey







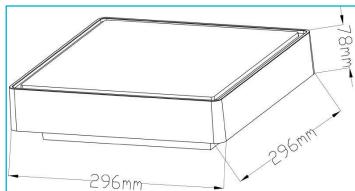

IP 65

Especially when it comes to lighting house entrances, patios or other access paths, spotlights specially designed for outdoors are the way to go. The protection classes required for such are part and parcel and different colours and shapes are options. Universal use and not to be overlooked as a security product.

Housing MaterialPlasticHousing ColorGreyMaterial of LensPlasticColour of LensWhite

Protection Class II/protective

insulation

Rated Input 16 W

Rated Input Voltage Frequency 220-240 V/AC 50 / 60 Hz

Power Supply Unit incl.YesConnection TypeClampDimmableNoMotion DetectorNo

Light Source LED, Light source not changeable

Color Temperature3000 KColour Consistency6 SDCMColour Rendering Index (Ra)80Rated Luminous Flux1110 lmRated Angle of Reflection115 Degree

Distribution Characteristic 120° DLS

Light Exit Surfaces1Light characteristicsDirectLight directionBelow

 Length
 296 mm

 Width
 296 mm

 Height
 78 mm

 Base length
 230 mm

 Base width
 230 mm

 Base height
 10 mm

Working Temperature -20 to 50 °CStorage Temperature -20 to 50 °C IP Protection Class

 Life Time L70 / B50
 30000 h

 Switching Cycles
 50000

 Power Consumption
 16 kWh/1000h

Energy Efficiency Class G

Deko-Light Elektronik-Vertriebs GmbH Auf der Hub 2 | D-76307 Karlsbad www.deko-light.com deko@deko-light.com