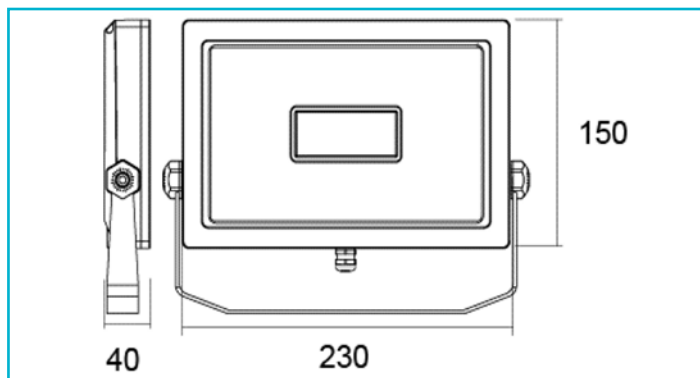


**Special features**

- Including 1.2 m connecting cable with IP44 shaped plug

Housing Material	Die-cast aluminium
Housing Color	Black
Material of Lens	Glass
Protection Class	Protection class I/protective grounding
Rated Input	30 W
Rated Input Voltage	220-240 V/AC 50 / 60 Hz
Frequency	
Power Supply Unit incl.	Yes
Connection Cable Primary	Yes
Primary Connection	Power plug IP44
Primary Cable Length	1.2 m
Connection Type According to Standard	Typ Y
Dimmable	No
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	5 SDCM
Colour Rendering Index (Ra)	80
Rated Luminous Flux	3600 lm
Rated Angle of Reflection	100 Degree
UGR	25
Distribution Characteristic 120°	DLS

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

Length	237 mm
Width	250 mm
Height	40.5 mm

Working Temperature	-20 to 40 °C
----------------------------	--------------

Storage Temperature	-10 to 60 °C
IP Protection Class Lamp	IP 65
IP Protection Class Plug	IP 44
IK Protection Class	IK08
Life Time L70 / B50	30000 h
Switching Cycles	150000
Power Consumption	30 kWh/1000h
Energy Efficiency Class	E