


Stratio | Free-Standing (1xLED 79W 840/4000K 10885lm)

— C0/C180 cd / 1000 lm - - - C90/C270

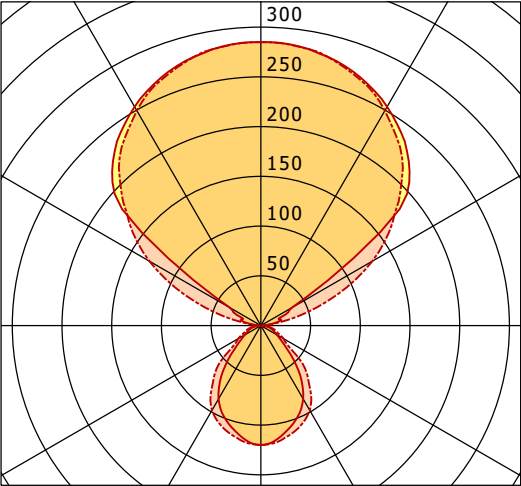

	C0	C90	C180	C270
0°	120	120	120	120
30°	85	99	85	99
60°	19	26	19	26
90°	1	1	1	1
120°	36	130	36	130
150°	254	249	254	249
180°	285	285	285	285
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η Efficiency Direct/Indirect System Power	LED 138 lm/W ↓ 24% / ↑ 76% 79 W
UGR Reflection factors UGR C0/C180 UGR C90/C270	X=4H, Y=8H 70/50/20 15.4 17.0
CIE Flux Codes Ra/CRI	60 86 97 24 100 > 80