



QualityFlex Performance flex lighting 100 mm, CRI > 95, 3 W / m, IP00  
Artikel-Nr. 76301027

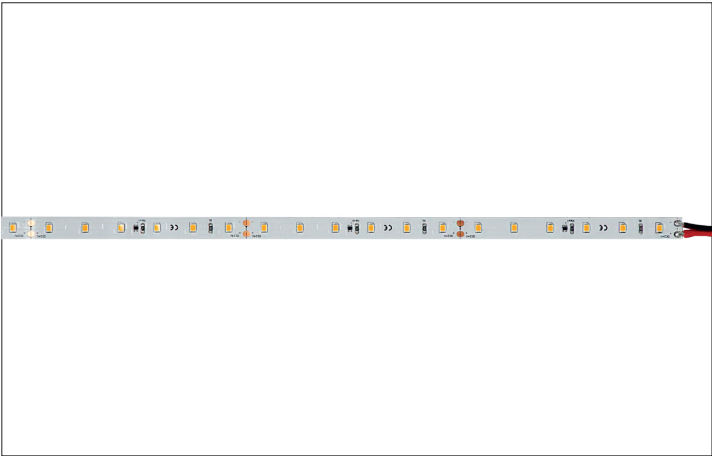

QualityFlex Performance flex lighting 100 mm, CRI > 95, 3 W / m, IP00, white, 2.700K, CRI > 95. LED flex lighting for decorative, technical as well as efficient lighting of light coves, linear applications and backlighting, basic or general lighting of rooms, architectural applications and for areas where high illumination is required, such as indirect or direct lighting, luminous ceilings, gastronomy lighting and much more. Länge: 100.0 mm Lampenleistung je Meter: 3.0 W/m, Lichtstrom je Meter: 258.0 lm/m, Schutzart raumseitig: IP00, Schutzklasse: III, Spannung: 24V DC, Abstrahlwinkel: 120.0 °, 60 LEDs pro Meter, Chip-Abstand (Short Pitch) : 16,7mm. Zur Individuellen Anwendung kann die LED-Flexplatine alle 100 mm eingekürzt werden. Die maximale Systemlänge von 30.000mm darf mit einer Einspeisung nicht überschritten werden.

|             |                  |
|-------------|------------------|
| Artikel-Nr. | 76301027         |
| Stand:      | 06.12.2021 17:01 |

|                               |          |
|-------------------------------|----------|
| Colour temperature            | 2700 K   |
| Light colour                  | White    |
| Luminous flux per meter       | 258 lm/m |
| Power                         | 15 W     |
| Lamp power per meter          | 3 W/m    |
| Beam angle                    | 120 °    |
| Length                        | 100 mm   |
| Width                         | 10 mm    |
| Aufbauhöhe                    | 1.4 mm   |
| Length of individual sections | 100 mm   |
| Degree of protection          | IP00     |
| Protection class              | III      |

|                               |                             |
|-------------------------------|-----------------------------|
| McAdam-Step                   | McAdam-Step 5               |
| Short Pitch                   | 16.7 mm                     |
| Number of lamps per meter     | 60 Qty                      |
| Voltage                       | 24V                         |
| Voltage type                  | DC                          |
| Ambient temperature           | -10 °C bis +40 °C           |
| Control                       | Dimming depending on driver |
| Circuit type                  | Parallel conduction         |
| Length of the connection line | 350 mm                      |
| Colour rendering              | CRI > 95                    |
| Maximum module length         | 30,000 mm                   |