


LK-L 070.10840.0705.U16/DALI


Lichtkanal 070 | Light-Insert (APB, 1xLED 8W 840/4000K 1100lm)

— C0/C180 cd / 1000 lm - - - C90/C270

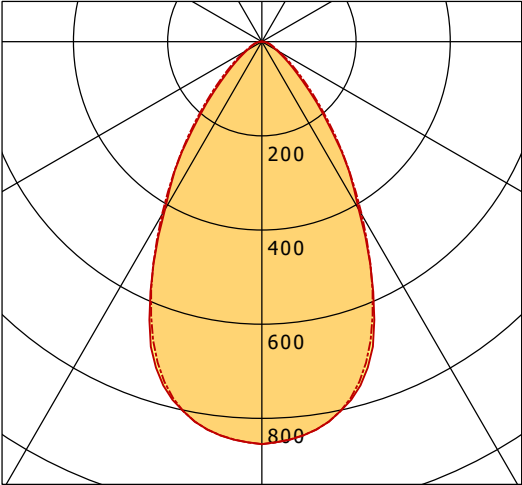

	C0	C90	C180	C270
0°	855	855	855	855
15°	773	766	773	766
30°	411	425	411	425
45°	132	145	132	145
60°	36	42	36	42
75°	15	16	15	16
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

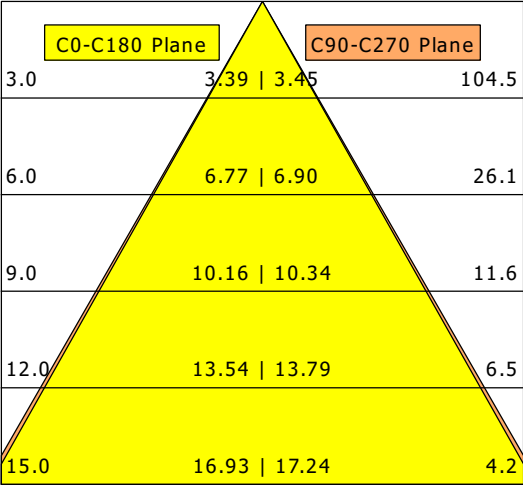

η		LED
Efficiency		138 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		8 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		15.9
UGR C90/C270		16.3
CIE Flux Codes		79 95 99 100 100
Ra/CRI		> 80