

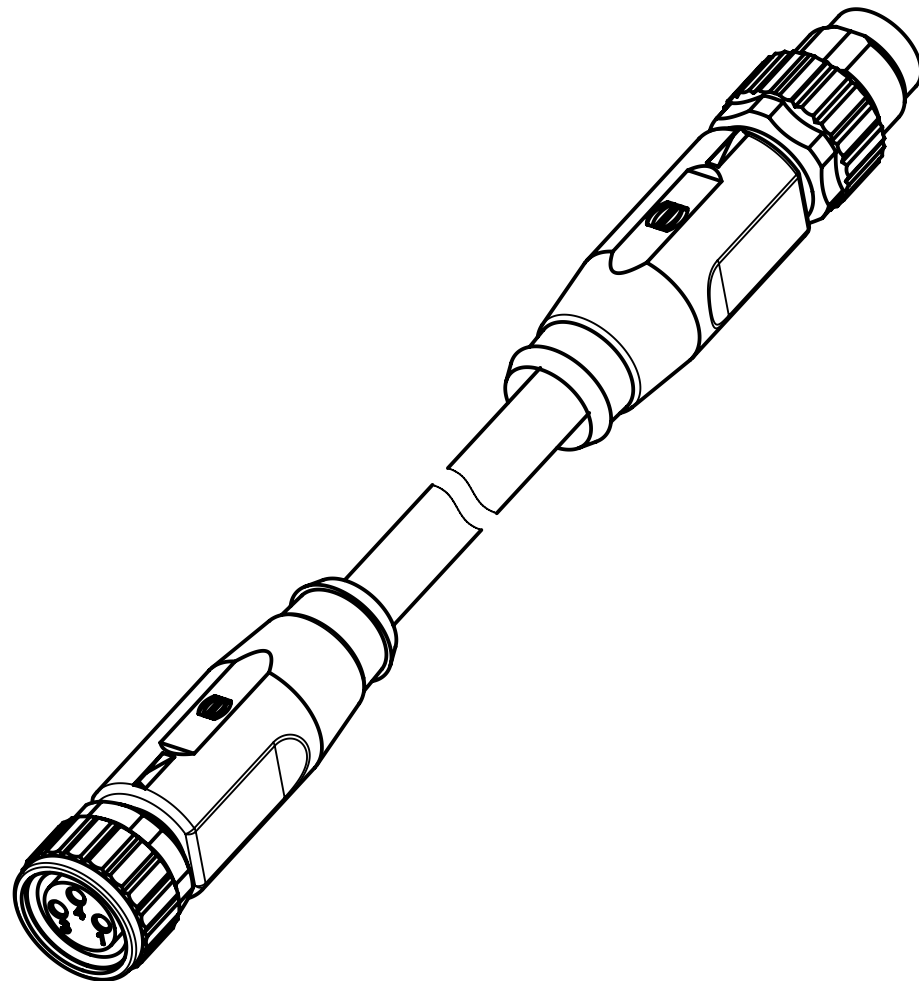


1		2		3		4		5		6		7		8	
A		 M8 Cable Assembly 3-poles st/st f/m 												A	
Technische Daten:															
B		Bemessungsspannung: IEC 61076-2-104				60 V									
		Strombelastbarkeit: IEC 61076-2-104				3 A bei 40°C									
B		Isolationswiderstand: IEC 60512				≥100 MΩ									
		Verschmutzungsgrad: IEC 60664-1				3/2									
C		Schutzart: IEC 60529				IP 67, im verschraubten Zustand									
C		Umgebungstemperatur: EN 60512-11-10 EN 60512-11-4 UL 2238				-30°C ... +80°C -40°C -40°C ... +85°C -30°C ... +50°C									
		Steckzyklen: IEC 60512-9a				≥100									
Kabeleigenschaften:															
D		Umgebungstemperatur: fest verlegt bewegt Biegezyklen:				-30°C ... +80°C -15°C ... +80°C ≥ 4 Mio. bei 3 m/s									
D		Kabel:				TPU, UL 20549 schwarz, 3x0,25mm², Li9Y11Y									
Werkstoffe:															
E		Kontakt:				CuZn, Ni3 Au 0,2 gal.									
		Kontaktträger:				PA, UL 94 V-0									
		Dichtung:				FPM									
E		Überwurfmutter/-schraube:				GD-Zn, Ni									
		Griffkörper:				TPU, UL 94 HB, schwarz									
Montagedaten:															
F		empfohlenes Drehmoment:				0,4 Nm									
F		 female  male 												F	
1		2		3		4		5		6		7		8	

 All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
 All rights reserved Department HCS - RO	Created by STOCHECIC Stochei		Inspected by COSTEA Costea	Standardisation MUNTEANV Muntean	Date 2019-03-05	State Final Release	
	Title M8 Cable Assembly 3-poles st/st f/m Type DS Number 21348081388XXX					Doc-Key / ECM-Nr. 100802886/UGD/000/A 500000148324	
HARTING Customised Solutions D-32339 Espelkamp						Rev. A	Page 1/1