




Special features

- Compact design
- Flicker-free
- Short-circuit-proof, overload protection, overheating protection

Housing Material	Plastic
Housing Color	Black
Operating Mode	Constant voltage
Protection Class	Protection class II/protective insulation
Power	50 W
Output Voltage	24 V/DC
Output Current	0-2100 mA
Power Factor	0.98
Connection Type	Clamp
Number of Circuit Breaker B10A max.	11
Number of Circuit Breaker B16A max.	18
Number of Circuit Breaker C10A max.	24
Number of Circuit Breaker C16A max.	39
Inrush Current max.	15 A / 300 µs
Capacitive Load	604.5 nF
Reference Point Tc	85 °C
Working Temperature	-20 to 50 °C
Storage Temperature	-20 to 70 °C
IP Protection Class	IP 20
Life Time	30000 h
Length	185 mm
Width	62 mm
Height	22 mm
Product weight	233 g

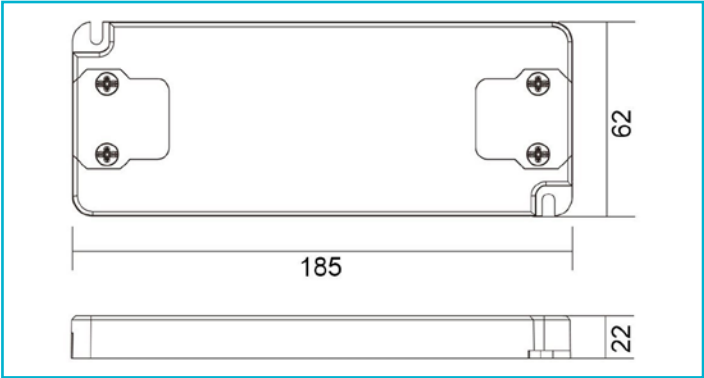