



## Produktdatenblatt

Art. Nr. 92.232.3010.1

### Konfektionierte Leitung GST18i3K1BS 15W 30SW

GST18i3 Verbindungsleitung Buchse - Stecker, Länge 3,0 m,  
3-polig, Kodierung Netz 250 V, 16 A, Kodierfarbe schwarz,  
Zugentlastungsfarbe schwarz, Leitungsfarbe schwarz,  
Leiterquerschnitt 1,5 mm<sup>2</sup>, Kabeltyp H05V2V2-F, Brandklasse: Eca



Art. Nr.	92.232.3010.1
----------	---------------

EAN	4015573692404
Bestelleinheit	25 Stück

**Zulassungen**

**Technische Daten**
**Allgemein**

Bemessungsstrom	16 A
Bemessungsspannung	250 V
Bemessungsstoßspannung	4 kV
Verschmutzungsgrad	2
Mechanische Codierung Code	Code 1
Verriegelbar	selbstverriegelnd (mit Werkzeug lösbar)
Codierfarbe / Kontakteinsatz	schwarz
Polkennzeichnung	L, N, PE
Gehäusefarbe mit Zugentlastung	schwarz

**Ausführung**

Leiter-Nennquerschnitt	1,5 mm <sup>2</sup>
Schutzart (IP)	IP20
Typ der Leitung	H05V2V2-F
Farbe der Leitung	schwarz
Kabeldurchmesser max.	8,3 mm
Leitungsart	Buchse - Stecker
Art der konfektionierten Leitung	Verbindungsleitung
Ausführung Seite 1	GST18i3 Buchse
Ausführung Seite 2	GST18i3 Stecker

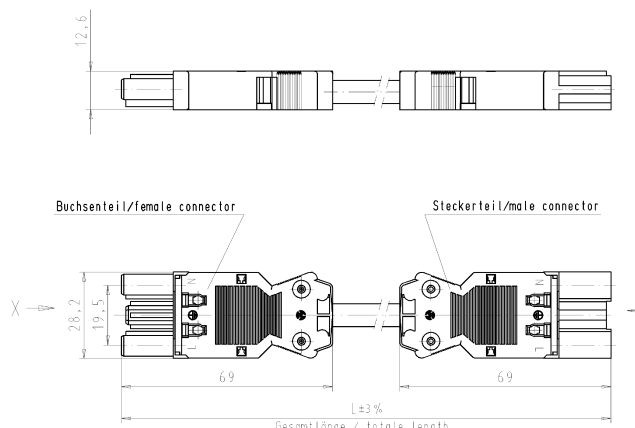
**Werkstoff**

Oberflächenbehandlung	verzinkt
Halogenfrei	nein
Leitung Dauertemperaturbeständigkeit	90 °C
Isolierteil Dauertemperaturbeständigkeit	100 °C
Brandlast	1,253 kWh
Brandklasse	Eca

**Abmessungen**

Gesamtlänge	3 m
-------------	-----

**Technische Zeichnung**

<p style="font-size: 8px;">             1. These drawings shall be executed in conformity with the standards listed below.              2. The drawings shall be executed in conformity with the standards listed below.              3. The drawings shall be executed in conformity with the standards listed below.           </p>		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>.F</th> <th>Farbe colour</th> <th>Codierung *X*</th> <th>Codierung *Y*</th> <th>Kabelfarbe cable colour</th> </tr> <tr> <td>.1</td> <td>schwarz black</td> <td></td> <td></td> <td>schwarz black</td> </tr> <tr> <td>.2</td> <td>weiß white</td> <td></td> <td></td> <td>weiß white</td> </tr> <tr> <td>.3</td> <td>grau grey</td> <td></td> <td></td> <td>schwarz black</td> </tr> <tr> <td>.5</td> <td>rot red</td> <td></td> <td></td> <td>schwarz black</td> </tr> </table>	.F	Farbe colour	Codierung *X*	Codierung *Y*	Kabelfarbe cable colour	.1	schwarz black			schwarz black	.2	weiß white			weiß white	.3	grau grey			schwarz black	.5	rot red			schwarz black	<p> <b>Buchenteil/female connector</b>  <b>Stecker/male connector</b> </p> <p> <b>Kabel/cable H05 V2V2-F3G1,5</b>  <b>wärmebeständig 90°C / heat resistant 90°C</b>  <b>Farbe/colour: siehe Tabelle/see table</b> </p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>Teile-Nr. part-no.</th> <th>L</th> <th>Beispiel (Farbe: schwarz) example (colour: black)</th> <th>Typ type</th> </tr> <tr> <td>92.232.XX10.F</td> <td>XX in dm-Schritten</td> <td>92.232.1010.1 = 10dm/L = 1000mm</td> <td>GST1813K1BS 15W 10SW</td> </tr> <tr> <td>U2.232.XX10.F</td> <td>XX in m-Schritten</td> <td>U2.232.1210.1 = 12 m/L = 12000mm</td> <td>GST1813K1BS 15W X12SW</td> </tr> </table> <p> <b>Typ/type: GST1813K1BS 15W ..</b>  <b>SW = schwarz/black</b>  <b>WS = weiß/white</b>  <b>GR01 = grau/grey</b>  <b>RT03 = rot/red</b> </p> <p style="font-size: 8px;"> <small>             1. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              2. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.              3. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              4. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small> </p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%; font-size: 8px;"> <small>             1. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              2. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small> </td> <td style="width: 15%; font-size: 8px;"> <small>             3. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              4. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small> </td> <td style="width: 15%; font-size: 8px;"> <small>             5. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              6. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small> </td> <td style="width: 15%; font-size: 8px;"> <small>             7. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              8. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small> </td> <td style="width: 15%; font-size: 8px;"> <small>             9. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              10. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small> </td> <td style="width: 15%; font-size: 8px;"> <small>             11. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              12. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small> </td> </tr> </table>	Teile-Nr. part-no.	L	Beispiel (Farbe: schwarz) example (colour: black)	Typ type	92.232.XX10.F	XX in dm-Schritten	92.232.1010.1 = 10dm/L = 1000mm	GST1813K1BS 15W 10SW	U2.232.XX10.F	XX in m-Schritten	U2.232.1210.1 = 12 m/L = 12000mm	GST1813K1BS 15W X12SW	<small>             1. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              2. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small>	<small>             3. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              4. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small>	<small>             5. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              6. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small>	<small>             7. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              8. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small>	<small>             9. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              10. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small>	<small>             11. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              12. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small>	<p style="font-size: 8px;"> <b>Weitere Daten siehe Katalog</b>  <b>further data see catalog</b> </p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%; font-size: 8px;"> <small>             1. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              2. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small> </td> <td style="width: 15%; font-size: 8px;"> <small>             3. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              4. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small> </td> <td style="width: 15%; font-size: 8px;"> <small>             5. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              6. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small> </td> <td style="width: 15%; font-size: 8px;"> <small>             7. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              8. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small> </td> <td style="width: 15%; font-size: 8px;"> <small>             9. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              10. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small> </td> <td style="width: 15%; font-size: 8px;"> <small>             11. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              12. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small> </td> </tr> </table>	<small>             1. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              2. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small>	<small>             3. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              4. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small>	<small>             5. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              6. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small>	<small>             7. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              8. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small>	<small>             9. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              10. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small>	<small>             11. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              12. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small>
.F	Farbe colour	Codierung *X*	Codierung *Y*	Kabelfarbe cable colour																																																	
.1	schwarz black			schwarz black																																																	
.2	weiß white			weiß white																																																	
.3	grau grey			schwarz black																																																	
.5	rot red			schwarz black																																																	
Teile-Nr. part-no.	L	Beispiel (Farbe: schwarz) example (colour: black)	Typ type																																																		
92.232.XX10.F	XX in dm-Schritten	92.232.1010.1 = 10dm/L = 1000mm	GST1813K1BS 15W 10SW																																																		
U2.232.XX10.F	XX in m-Schritten	U2.232.1210.1 = 12 m/L = 12000mm	GST1813K1BS 15W X12SW																																																		
<small>             1. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              2. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small>	<small>             3. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              4. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small>	<small>             5. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              6. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small>	<small>             7. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              8. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small>	<small>             9. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              10. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small>	<small>             11. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              12. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small>																																																
<small>             1. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              2. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small>	<small>             3. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              4. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small>	<small>             5. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              6. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small>	<small>             7. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              8. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small>	<small>             9. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              10. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small>	<small>             11. Zeichnung nach DIN 2152/Technical drawing according to DIN 2152.              12. This DIN standard describes the envelope principle. According to the envelope principle the deviation of form and position are limited by the size tolerances.           </small>																																																