




Special features

- Flicker-free
- Short-circuit-proof, overload protection, overheating protection

Housing Material	Plastic
Housing Color	Black
Operating Mode	Constant voltage
Protection Class	Protection class II/protective insulation
Power	150 W
Output Voltage	24 V/DC
Output Current	0-6250 mA
Power Factor	0.98
Connection Type	Clamp
Number of Circuit Breaker B10A max.	2
Number of Circuit Breaker B16A max.	4
Number of Circuit Breaker C10A max.	6
Number of Circuit Breaker C16A max.	9
Inrush Current max.	60 A / 300 μ s
Capacitive Load	591.2 nF
Reference Point Tc	85 $^{\circ}$ C
Working Temperature	-20 to 50 $^{\circ}$ C
Storage Temperature	-20 to 50 $^{\circ}$ C
IP Protection Class	IP 20
Life Time	30000 h
Length	210 mm
Width	67 mm
Height	34 mm
Product weight	556 g

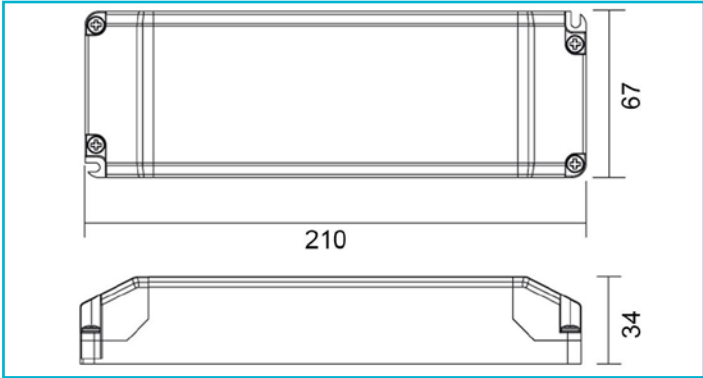