


**USB power supply 3,4A
with 1 × Type A, 1 × Type C (QC 3.0)**

Product Data Sheet

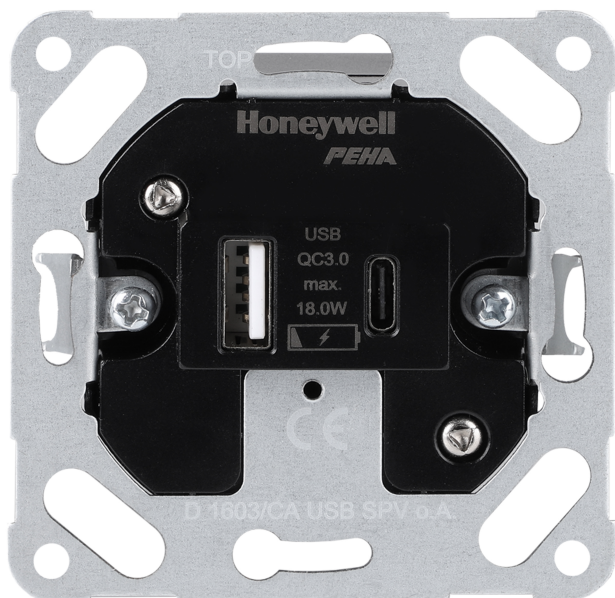

Halogen free	Yes
Model	Other
Mounting method	Flush mounted (plaster)
Material	Plastic
Surface protection	Other
Surface finishing	Not applicable
Colour	Other
Type of fastening	Mounting with screw
MP3	no
radio link	no

**USB power supply 3,4A
with 1 × Type A, 1 × Type C (QC 3.0)**

USB charging station 3.4 A, with USB type A+C (QC3.0)

With 1x USB A + 1x USB C, output voltage 5-12 V, for powering and charging mobile devices, the charging current is automatically divided between the charging sockets, short-circuit proof, without central plate.

Technical data: Rated voltage: AC 110-250 V~ Power frequency: 50/60 Hz Output: USB type A or C only: USB output voltage DC 5 V, charging current 3.0 A (max.15 W), USB output voltage DC 9 V, charging current 2.0 A (max.18 W), USB output voltage DC 12 V, charging current 1.5 A (max.18 W). USB type A+C (parallel operation): USB output voltage DC 5 V, charging current 3.4 A (max.17 W). Screw terminals: 2x 1.5 mm² to 2x 2.5 mm² Protection class: IP20 Device output: galvanically isolated USB charging sockets: overcurrent and short-circuit protected.

Material No.	Article No.	EAN-code
00971403	D 1603/CA USB SPV O.A.	4010105971408

PEHA Elektro GmbH & Co.KG

a Honeywell Company
Daimlerstraße 4
58553 HALVER
DEUTSCHLAND

Tel.: 02353 9118 001
Fax: 02353 9118 311
mail: peha@honeywell.com
www.peha.de

Änderungen vorbehalten. © Honeywell PEHA