
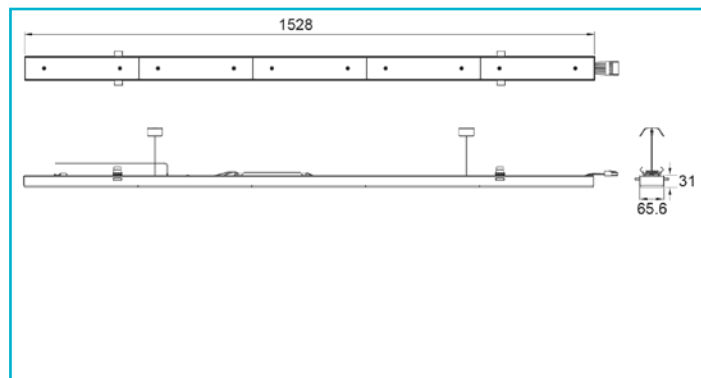


Art. no. 707226

Trunking system Sanotrunk Universal 30 degree, 70 W,
On/Off, 4000 K, White

 **DEKO LIGHT**



Housing Material Aluminium
Housing Color White
Material of Lens PMMA
Halogen free Yes
Functions Leuchte kann mit Gleichstrom aus einer Zentralbatterie eines Notstromsystems betrieben werden., Phase switch

Protection Class Protection class I/protective grounding
Power Selectable 70 W, 64 W, 55 W, 49 W, 39 W, 34 W, 26 W, 20 W
Rated Input Voltage 198-264 V/AC
Dimmable No
Voltage range DC 168-275 V/DC
Voltage range emergency lighting 186-250 V/DC
EOFI 100 %

Light Source LED, Light source changeable TC
Lightcolor Neutral white
Color Temperature 4000 K
Colour Consistency 3 SDCM
Colour Rendering Index (Ra) 80
Rated Luminous Flux 12400 lm
Luminous Efficiency 165 lm/W
Rated Angle of Reflection 30 Degree
UGR 22

Light characteristics Direct
Light direction Below

Length 1528 mm
Width 656 mm
Height 310 mm
Product weight 1950 g

Working Temperature -25 to 50 °C
Storage Temperature -25 to 85 °C
IP Protection Class IP 40
IK Protection Class IK04

Life Time L70 / B50 130000 h
Life Time L80 / B10 72000 h
Life Time L80 / B50 85000 h
Switching Cycles 50000
Power Consumption 70 kWh/1000h

