


Art. no. 565410

Downlight Anik Rund 130, 9 W, DIM, 2700 K, white

 **DEKOLIGHT**

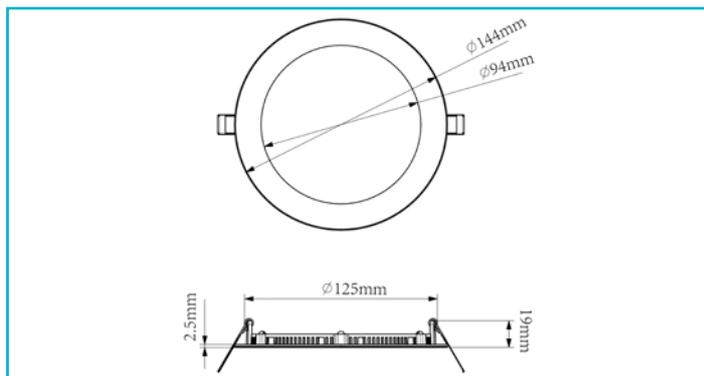

Housing Material	Aluminium, Steel, PMMA - Polymethyl methacrylate
Housing Color	White
Surface structure	Powder-coated, Fine structure, Matt
Material of Lens	Plastic
Colour of Lens	White

Protection Class	Protection class III/safety extra-low voltage
Operating Mode	Constant current
Rated Input	9 W
Rated Input Voltage	32-37 V/DC
Rated Current	260 mA
Power Supply Unit incl.	No
Dimmable	Yes
Control	Dimmable via optional power supply unit
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	2700 K
Colour Consistency	5 SDCM
Colour consistency light source	3 SDCM
Colour Rendering Index (Ra)	90
Rated Luminous Flux	1070 lm
Luminous Efficiency	118.88 lm/W
Rated Angle of Reflection	120 Degree
UGR	19

Light Exit Surfaces	1 PCS
Light characteristics	Direct
Light direction	Below

Height	19 mm
Diameter	144 mm
Installation Depth	16.5 mm

Cut Out Diameter	130 mm
Working Temperature	-10 to 45 °C
Storage Temperature	-20 to 60 °C
IP Protection Class	IP 20, IP 44
IK Protection Class	IK05

Life Time L70 / B50	75000 h
Life Time L80 / B10	50000 h
Life Time L80 / B50	60000 h
Switching Cycles	100000 PCS
Power Consumption	9 kWh/1000h