


Very HRC Fuses 5x20 400V - FA Very Fast Acting

FROM 0,1 TO 4A

Dimensions

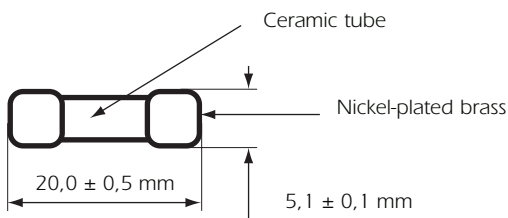

Fuses with filler
Max weight : 1,2 g

Basic Characteristics


Size	Rated Voltage	Rated Current	Breaking Capacity under 400 V AC	[I ² t] Pre-arcing	[I ² t] Total clearing at Un	Max voltage drop at In	Designation	Reference Number	Catalog Number
mm	VAC	A		A ² s		V			
5 x 20	400	0,100	10 kA cos φ ≥ 0,7	0,00057	0,0033	1,8	400V FA 0,100 A 5x20	T093305	MI5FA40V0,1
		0,125		0,00077	0,0045	1,7	400V FA 0,125 A 5x20	W093307	MI5FA40V0,125
		0,160		0,0020	0,0123	1,3	400V FA 0,160 A 5x20	Y093309	MI5FA40V0,16
		0,200		0,0046	0,0275	1,1	400V FA 0,200 A 5x20	P095992	MI5FA40V0,2
		0,250		0,009	0,054	1,0	400V FA 0,250 A 5x20	E093315	MI5FA40V0,25
		0,315		0,016	0,095	0,90	400V FA 0,315 A 5x20	Q093348	MI5FA40V0,315
		0,400		0,03	0,18	0,85	400V FA 0,400 A 5x20	G093317	MI5FA40V0,4
		0,500		0,05	0,3	0,80	400V FA 0,500 A 5x20	H093318	MI5FA40V0,5
		0,630		0,12	0,73	0,70	400V FA 0,630 A 5x20	J093319	MI5FA40V0,63
		0,800		0,25	1,52	0,60	400V FA 0,800 A 5x20	L093321	MI5FA40V0,8
		1,000		0,11	0,45	0,46	400V FA 1,000 A 5x20	F093270	MI5FA40V1
		1,250		0,26	1,1	0,36	400V FA 1,250 A 5x20	M093322	MI5FA40V1,25
		1,600		0,39	1,6	0,42	400V FA 1,600 A 5x20	N093323	MI5FA40V1,6
		2,000		0,81	3,3	0,37	400V FA 2,000 A 5x20	P093324	MI5FA40V2
		2,500		1,44	5,8	0,34	400V FA 2,500 A 5x20	M093345	MI5FA40V2,5
3,150	2,46	10	0,33	400V FA 3,150 A 5x20	N093346	MI5FA40V3,15			
4,000	4,6	18,7	0,31	400V FA 4,000 A 5x20	P093347	MI5FA40V4			

Ratings lower than 0,1A : please enquire.


Very HRC Fuses 5x20 400V - FA Very Fast Acting

Time-current characteristics

400V FA 5x20

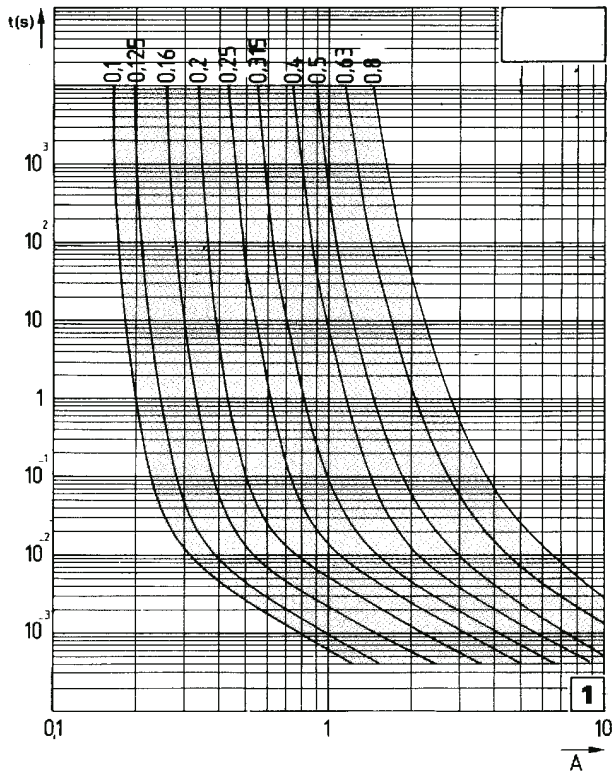

400V FA 5x20

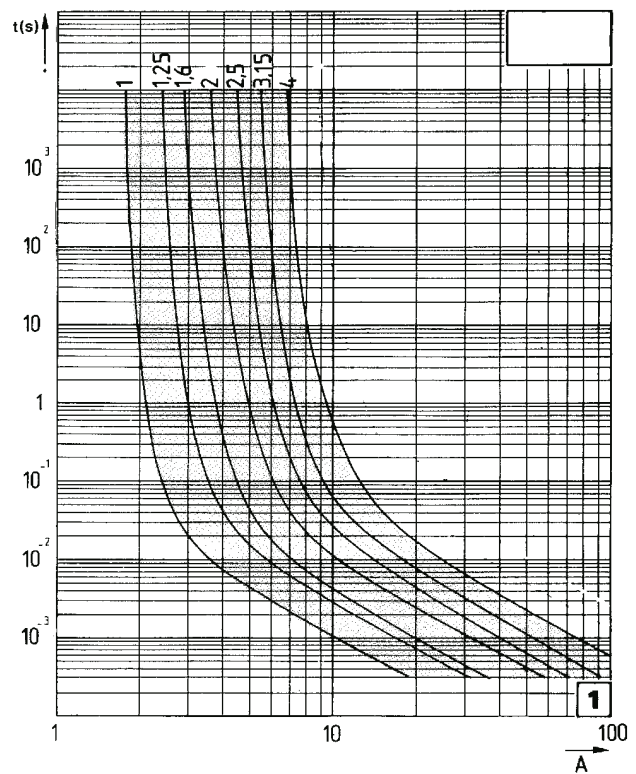

I margin $\pm 12\%$. Actual pre-arcing time(s). R.M.S. Value of pre-arcing current (A).

Packaging: Blister per 50 pièces.

For a 1000 pieces box packaging consult us.