


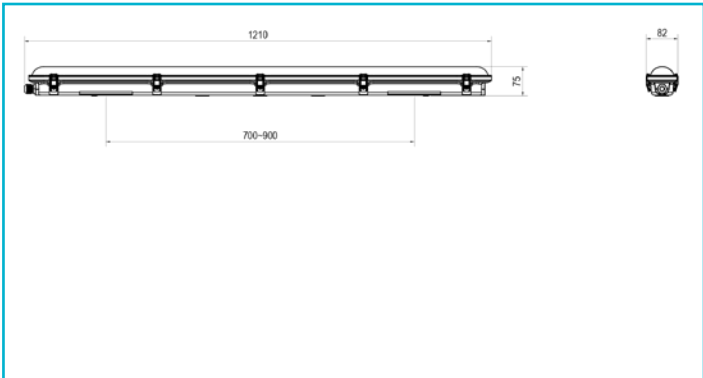

Housing Material	Polycarbonate (PC)/iron	Power Consumption	36 kWh/1000h
Housing Color	Grey	Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class C.
Protection Class	Protection class I/protective grounding		
Rated Input	36 W		
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz		
Power Supply Unit incl.	Yes		
Connection Type	Clamp		
Number of Cable Entries	2		
Cable Gland Diameter	12 mm		
Dimmable	No		
Motion Detector	No		
Light Source	LED, Light source changeable TC		
Color Temperature	4000 K		
Colour Consistency	6 SDCM		
Colour Rendering Index (Ra)	80		
Rated Luminous Flux	5040 lm		
Light Exit Surfaces	1		
Light characteristics	Direct		
Light direction	Below		
Length	1210 mm		
Width	82 mm		
Height	75 mm		
Working Temperature	-20 to 40 °C		
Storage Temperature	-40 to 75 °C		
IP Protection Class	IP 65		
IK Protection Class	IK08		
Life Time L80 / B50	50000 h		
Switching Cycles	25000		