


ORYO-T 203.940.15/CAS

Oryo 200 | Track-Mounted (1xLED 30W 940/4000K 3080lm)

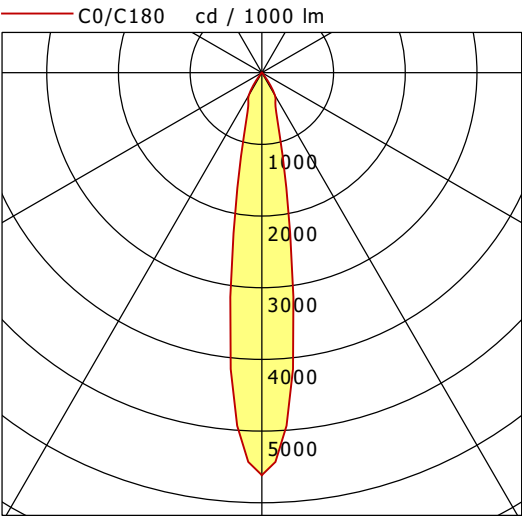

	C0	C90	C180	C270
0°	5615	5615	5615	5615
15°	1034	1034	1034	1034
30°	365	365	365	365
45°	10	10	10	10
60°	9	9	9	9
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	0.93	1921.5
6.0	1.86	480.4
9.0	2.79	213.5
12.0	3.72	120.1
15.0	4.65	76.9

η		LED
Efficiency		103 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		30 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		19.0
UGR C90/C270		19.0
CIE Flux Codes	98 100 100 100 100	
Ra/CRI		> 90