


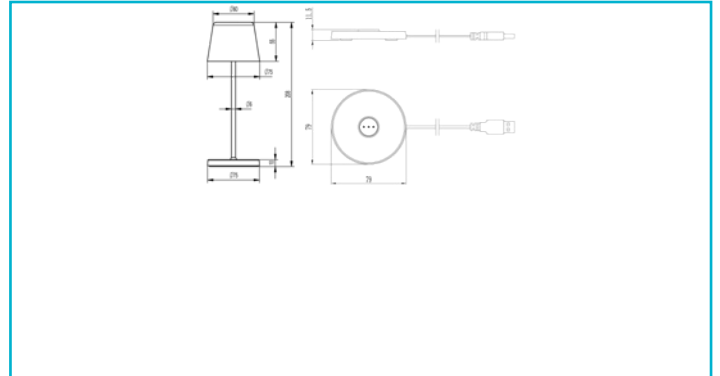

Housing Material	Die-cast aluminium	Working Temperature	-20 to 40 °C
Housing Color	Beige, Black	Storage Temperature	-20 to 50 °C
Housing Surface	Matt	IP Protection Class	IP 65
Material of Lens	Polycarbonate - PC	IK Protection Class	IK04
Surface Structure of Lens	Clear		
Protection Class	Protection class III/safety extra-low voltage	Life Time L70 / B50	20000 h
Rated Input	2.3 W	Power Consumption	3 kWh/1000h
Rated Input Voltage	3.7 V/DC		
Dimmable	Yes		
Control technology	Touch-Sensor		
Motion Detector	No		
Accumulator/Battery Operated	Yes		
Number of Accumulator/Battery	1		
Type of Accumulator/Battery	3.7 V lithium ion battery (903050)		
Accumulator/Battery Capacity	3000 mAh		
Accumulator/Battery Voltage	3.7 V		
Accumulator Charging Time	4.5 h		
Accumulator Operating Time	8 h		
Light Source	LED, Light source changeable TC		
Lightcolor	Warm white (WW)		
Color Temperature	2200/3000 K		
Colour Rendering Index (Ra)	80		
Rated Luminous Flux	110 lm		
Luminous Efficiency	47.8 lm/W		
Light Exit Surfaces	1		
Light characteristics	Direct		
Light direction	Below		
Height	208 mm		
Diameter	76 mm		
Product weight	437 g		