
## Table lamp Brahe, 8,5 W, 3000 K, white





Whether as a bedside lamp or a standing lamp behind your reading armchair, conventional reading lights often lack an indirect lighting option for when you put your book or newspaper down. This is where the BRAHE comes into its own, with its illuminated base that can be switched separately, creating atmospheric indirect islands of light that impressively provide just the right level of illumination even after you have finished reading.

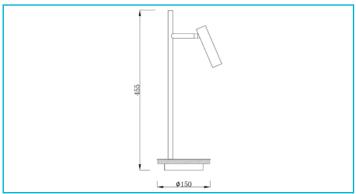

## Special features

- Can be rotated and swivelled
- Direct and indirect lighting can be switched on separately
- Small light emission angle

Housing Material	Aluminium
Housing Color	White
Protection Class	Protection class II/protective insulation
Power Selectable	2 W, 4.8 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Cable Primary	Yes
Primary Connection	Power plug IP20
Connection Type According to Standard	Тур Ү

No No LED, Light source not changeable

Warm white (WW) Lightcolor **Color Temperature** 3000 K **Colour Consistency** 6 SDCM Colour Rendering Index (Ra) 80 **Rated Luminous Flux** 470 lm **Luminous Efficiency** 55.29 lm/W Rated Angle of Reflection 25 Degree **Light Distribution** Symmetric

**Distribution Characteristic** DLS

120°

Dimmable

**Motion Detector** 

**Light Source** 

**Swivel Angle** 90 Degree **Light Exit Surfaces** 

Light characteristics Direct, Indirect **Light direction** Below, Side

455 mm Height Diameter 150 mm **Product weight** 1373 g

**Working Temperature** 0 to 60 °C **Storage Temperature** 0 to 60 °C **IP Protection Class IP 20** 

Life Time L70 / B50 30000 **Switching Cycles** 10000 9 kWh/1000h **Power Consumption** 

**Energy Efficiency Class** 

Deko-Light Elektronik-Vertriebs GmbH Auf der Hub 2 | D-76307 Karlsbad www.deko-light.com deko@deko-light.com