

Wall mounting socket outlet, fused - housing dimensions 260x160, with C-type circuit breaker




| Product description | |
|-------------------------------|---------------------------------------|
| BALS-Prd.-Nr | 15145 |
| EAN | 4024941151450 |
| product category (PG) | TE wall mounting socket outlet, fused |
| current (A) | 63A |
| number of poles (P99) | 5p |
| number of poles (P) | 3p+N+PE |
| position of earth contact (H) | 6 h |
| voltage (V) | 200/346 up to 240/415V |

| Product description | |
|-----------------------------|--|
| frequency (HZ) | 50 and 60Hz |
| protection degree (SA) | IP67 |
| colour code 1 (KF1) | red RAL 3000 |
| Colour of appliance | Operating window smoky topaz, Hinged lid red RAL 3000, Bayonet ring grey RAL 7035, Housing screws grey RAL 7035, Housing bottom grey RAL 7035, Housing top grey RAL 7035 |
| connection design (AT) | screw terminal as box terminal with Kontex-contact |
| maximum conductor size (LQ) | 25.0 qmm |
| cable entry (KE) | top entry M40 bottom entry M40/M32 |
| Height | 304mm |
| Width | 160mm |
| Depth | 195mm |
| dimension of enclosure (GG) | 260x160 mm (HxW) |
| material of enclosure (GM) | Polycarbonate |
| contact | The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Additional technical properties | |
|---------------------------------|--|
| | The cable entry is one at top and two at bottom open |
| | With 3 pole C-type MCB |

| Logistics data | |
|----------------|------------------|
| Weight/pcs | 2.535 kg / Piece |

| Logistics data | |
|----------------|---------------|
| Packaging | Carton |
| Content amount | 1 ST |
| EAN | 4024941151450 |
| Length | 325 mm |
| Width | 217 mm |
| Height | 210 mm |
| Weight | 2.751 kg |
| Volume | 13,588.4 ccm |

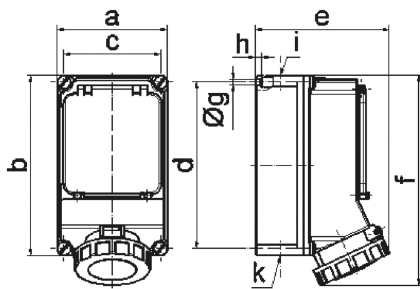

14 MB 11

| Ampere | 32 | 32 | 63 | 63 | | |
|---------|--------|--------|--------|--------|--|--|
| Polzahl | 4 | 5 | 4 | 5 | | |
| a | 160,0 | 160,0 | 160,0 | 160,0 | | |
| b | 260,0 | 260,0 | 260,0 | 260,0 | | |
| c | 140,0 | 140,0 | 140,0 | 140,0 | | |
| d | 240,0 | 240,0 | 240,0 | 240,0 | | |
| e | 172,0 | 174,0 | 195,0 | 195,0 | | |
| f | 293,0 | 294,0 | 304,0 | 304,0 | | |
| g ø | 8,1 | 8,1 | 8,1 | 8,1 | | |
| h | 10,0 | 10,0 | 10,0 | 10,0 | | |
| i | M40 | M40 | M40 | M40 | | |
| k | M32/40 | M32/40 | M32/40 | M32/40 | | |
| | | | | | | |
| | | | | | | |