


QUALITYFLEX Individual dim2warm LED-Flexplatine 100 mm, CRI > 80,
14,4 W / m, IP65
Article no. 75369003

Light.
For Generations.

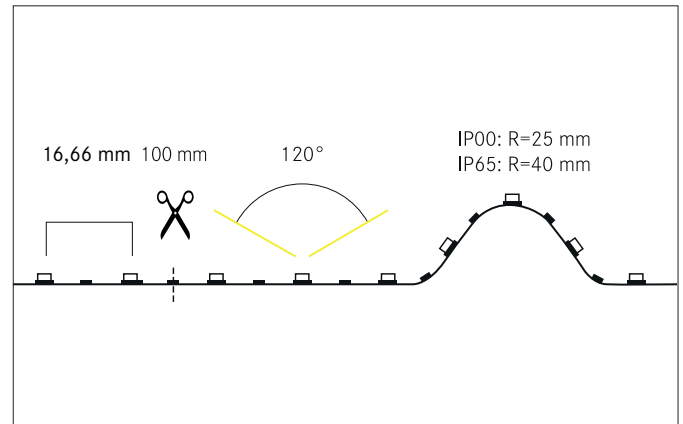

Tender

dim2warm LED-Flexplatine 100 mm, CRI > 80, 14,4 W / m, IP65, white, 3.000K-1.800K, CRI > 80. LED flex lighting for Length: 100.0 mm
Lamp power per meter: 14.4 W/m, Luminous flux per meter: 1240.0 lm/m, Degree of protection: IP65, Protection class: III, Voltage: 24V ,
Beam angle: 120.0 °, 120 LEDs per meter, Chip distance (Short Pitch) : 16,66mm. For individual application, the LED flex board can be
used all 100 mm be cut back. The maximum system length of 5.000mm must not be exceeded with one feed-in.

Product Benefits

- Sorgt mit modernster LED-Technologie für Wohlfühlambiente beim Abdimmen des Lichtes.
- Dimmeffekte wie bei der Glühlampe und warmweißes Licht.
- Hoher Lichtstrom durch 14,4 W/m.
- Farbtemperatur: 3.000 Kelvin bis 1.800 Kelvin.
- Abgestimmt zu unsere dim2warm Strahler.
- Ansteuerung: 2-adrig.
- Dimmbar mit entsprechenden Zubehör*.

* Kompatibel zu allen Brumberg-LED-Dimmern, außer zu den phasendimmbaren
Konvertern mit den Artikelnummern: 17230000, 17231000 und 17232000.

QUALITYFLEX Individual dim2warm LED-Flexplatine 100 mm, CRI > 80,
14,4 W / m, IP65
Article no. 75369003

Light.
For Generations.

Article data	
Article no.	75369003
GTIN	4251433958185
Series name	QUALITYFLEX Individual
Short description	dim2warm LED-Flexplatine 100 mm, CRI > 80, 14,4 W / m, IP65
Colour	White
Length	100 mm
Width	12.5 mm
Hight	1.5 mm
Scope of delivery	1 x Montageanleitung
Weight	0.020 kg
Length of the connection line	300 mm

Lighting technology	
Colour temperature	3000 - 1800 K
Light colour	White
Luminous flux per meter	1,240 lm/m
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 80
Beam angle	120°

Operating technology of the luminaire	
Lamp power per meter	14.4 W/m
Voltage type	DC
DC nominal voltage max	24 V
Lamp	LED
Protection class	III
Degree of protection	IP65
Ambient temperature	-10 °C bis +40 °C
Dimmable	Yes
Wire number	2
Control	Dimming depending on driver
Length of the connection line	300 mm
Design of the connecting cable	einseitig
Bulb change possible	No
Rated life time L70/B50 at 25 °C	54000 h
Rated life time L80/B20 at 25 °C	51000 h
Energieeffizienzklasse	F

Operating technology of QualityFlex	
Short Pitch	16.66 mm
Number of lamps per meter	120 Qty
Length of individual sections	100 mm
Smallest bend radius	40 mm
Length	100 mm
Maximum module length	5,000 mm
Circuit type	Parallel conduction
LED Type	2835 LED

QUALITYFLEX Individual dim2warm LED-Flexplatine 100 mm, CRI > 80,
14,4 W / m, IP65
Article no. 75369003

Light.
For Generations.

Packing data	
Gross weight	0.023 kg
Length of packaging	70 mm
Packaging width	45 mm
Packaging height	80 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

Compatible Driver						
Article no.	Power min	Power	Control	Length	Width	Hight
17206000	1 W	20 W	1-10 V	146 mm	55 mm	19 mm
17207000	1 W	30 W	on/off	160 mm	50 mm	22 mm
17214000	1 W	7.2 W	on/off	68 mm	35 mm	21 mm
17223000	1 W	75 W	on/off	185 mm	60 mm	31 mm
17224000	1 W	100 W	on/off	199 mm	63 mm	36 mm
17225000	1 W	150 W	on/off	219 mm	63 mm	36 mm
17226000	1 W	240 W	on/off	244 mm	71 mm	38 mm
17240000			on/off			

Compatible Controller						
Article no.	Power min	Power	Control	Length	Width	Hight
17502000	0 W	120 W	DALI	183 mm	33 mm	23 mm
18151000	24 W	240 W	KNX	170 mm	59 mm	30 mm
18152000	24 W	240 W	DALI	170 mm	59 mm	30 mm
18153000	24 W	240 W	DMX	170 mm	59 mm	30 mm
18154000	24 W	240 W	1-10 V	170 mm	59 mm	30 mm
18161000	24 W	240 W	KNX	72 mm	90 mm	70 mm
18162000	24 W	240 W	DALI	54 mm	110 mm	66 mm
18164000	24 W	240 W	1-10 V	54 mm	110 mm	66 mm
17528000	1 W	240 W	Wireless technology control			
17511000	1 W	240 W	Wireless technology control	145 mm	46.5 mm	16 mm
18157000	48 W	240 W	Zigbee	145 mm	46.5 mm	16 mm
18192000	120 W	240 W	Wireless technology control	160 mm	45 mm	18 mm

Compatible Profiles				
Short description	Series name	Length	Width	Hight
Surface-mounted profile	P06-20	2,000 mm	23 mm	25.1 mm
LED-Anbauprofil	P30-30	2,000 mm	33.4 mm	29.6 mm
Surface-mounted profile	P16-16	2,000 mm	18.8 mm	18.6 mm
Surface-mounted profile, high	QUALITYFLEX ONE		17.6 mm	15.9 mm
Recessed profile	P36-20	2,000 mm	30 mm	20.4 mm
LED-Einbauprofil	P40-30	2,000 mm	44.4 mm	24 mm
Plaster profile	P37-30	2,000 mm	63.4 mm	15.9 mm
Plaster profile	P38-30	2,000 mm	63.4 mm	24 mm