



Connector Location A

Connector Location B

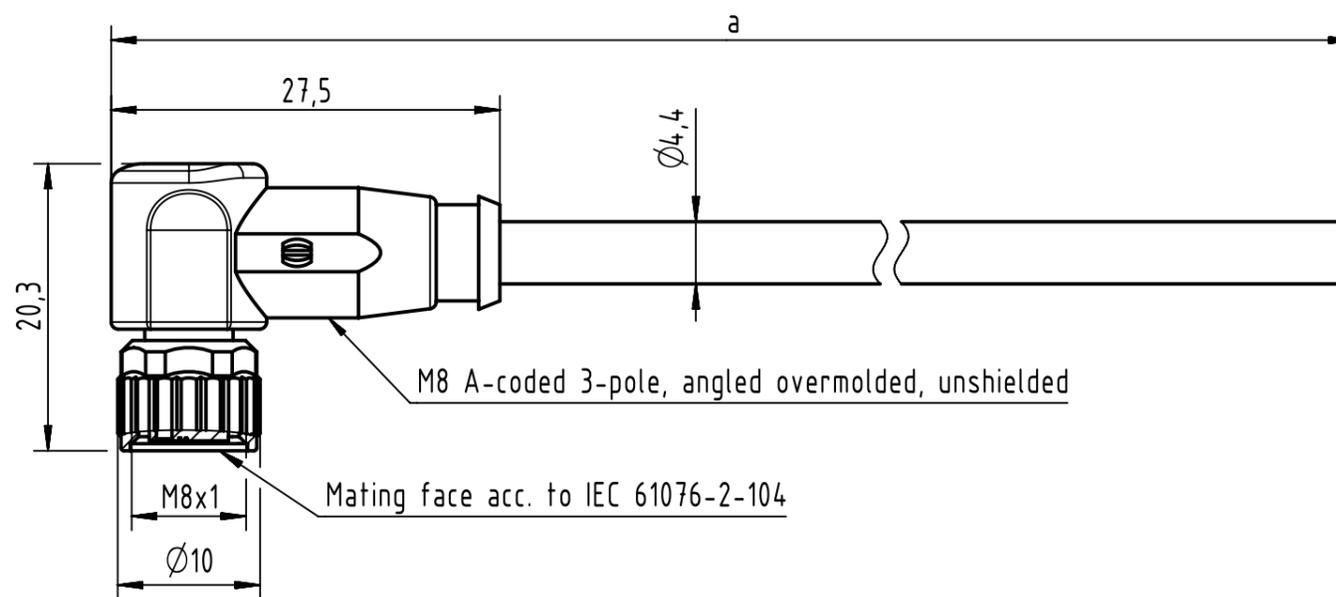


X female

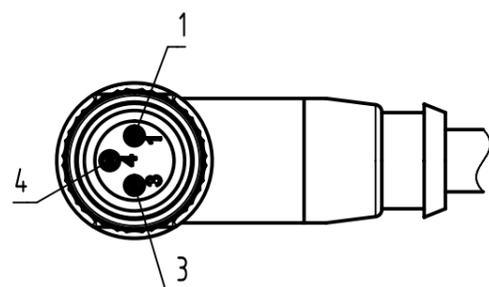

Loading Plan

- 1 — brown
- 3 — blue
- 4 — black

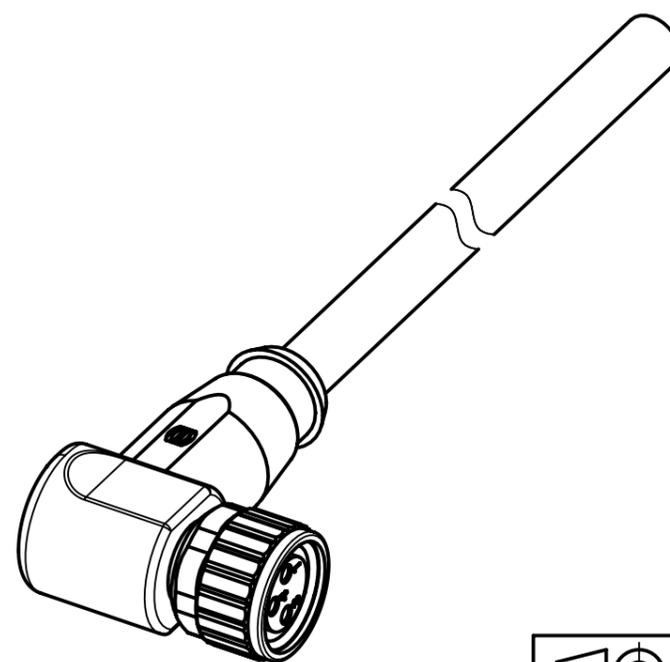

- Protection level: IP65/67
- Temperature range: -25°C ... +80°C

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	0.1	XXX=001
Step	a [m]	XXX

4.0 to 100	±1%
0.1 to 3.9	+0.04
a [m]	Tolerance

PVC grey, 3x0.25mm <sup>2</sup>	21348300380XXX
Type of cable	Part no.

	All rights reserved		Created by STOCHECIC Stocheci		Inspected by COSTEA Costea		Standardisation MUNTEANV Muntean		Date 2023-04-20		State Final Release	
	Department HCS - RO		Title M8 Cable Assembly 3-poles an/- f/-		Doc-Key / ECM-Nr. 100577868/UGD/009/D 500000239724		Rev. D		Page 1/1			
HARTING Customised Solutions D-32339 Espelkamp		Type TB		Number 21348300380XXX								