


Connector Location A


Connector Location B

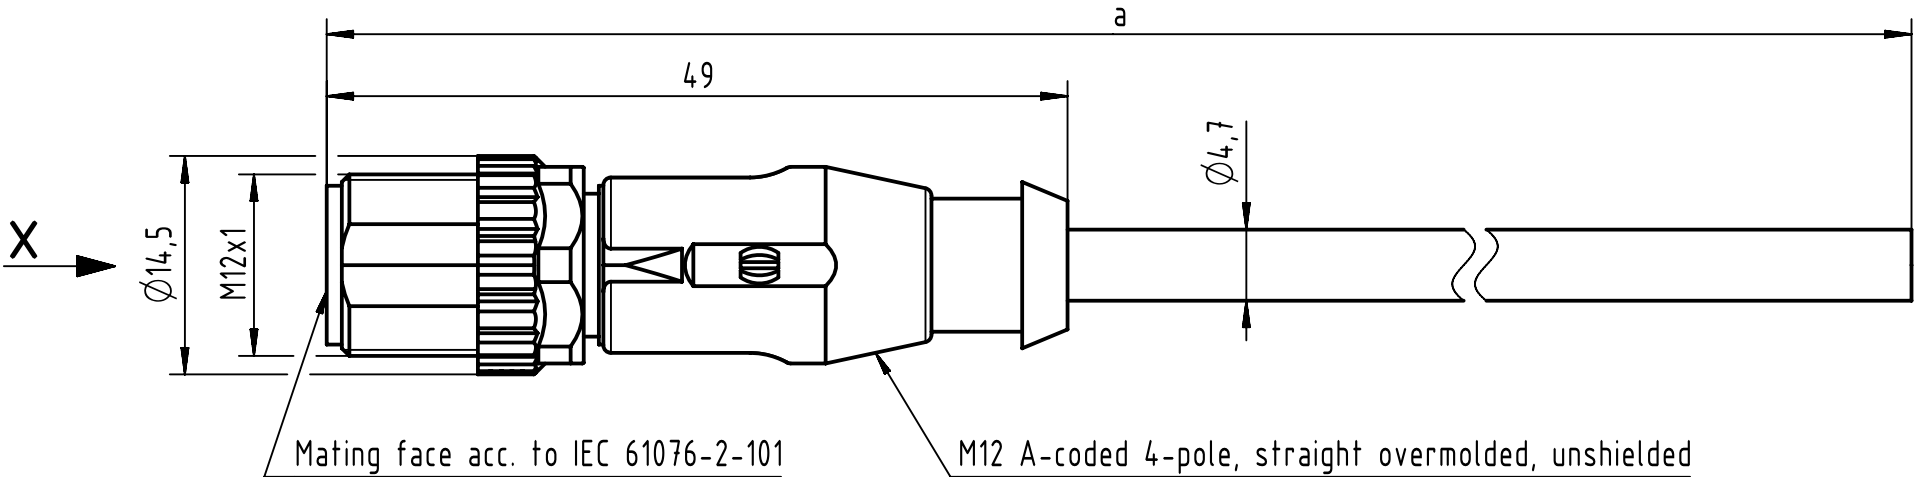

Mating face acc. to IEC 61076-2-101


M12 A-coded 4-pole, straight overmolded, unshielded

X
male



Loading Plan

- 1 brown
- 2 white
- 3 blue
- 4 black

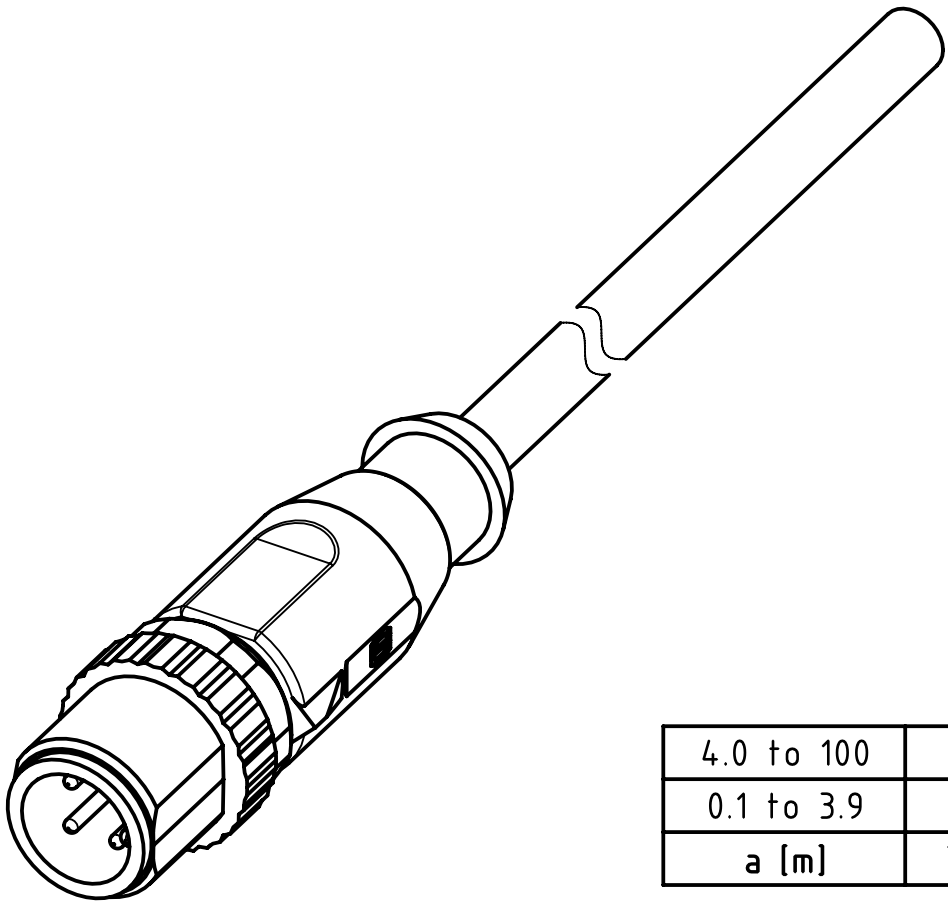

- Protection level: IP67
- Temperature range: -25°C ... +80°C

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	0.1	XXX=001
Step	a [m]	XXX

4.0 to 100	±1%
0.1 to 3.9	+0.04
a [m]	Tolerance

PUR black, 4x0.34mm ²	21348400491XXX
Type of cable	Part no.

All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
	All rights reserved	Created by 407576 Stoica	Inspected by COSTEA Costea	Standardisation MUNTEANV Muntean	Date 2023-02-24	State Final Release	
	Department HCS - RO	Title M12 Cable Assembly A-cod st/- m/-				Doc-Key / ECM-Nr. 100806167/UGD/009/B 500000238090	
	HARTING Customised Solutions D-32339 Espelkamp	Type TB	Number 21348400491XXX			Rev. B	Page 1/1