



BIXXL 204.30.40.2

Bixxl 200 (1xLED 41W 830/3000K 4140lm 40 °)

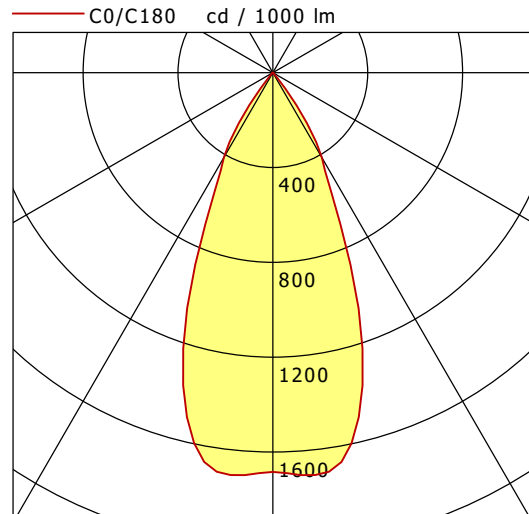

| | C0 | C90 | C180 | C270 |
|--------------|------|------|------|------|
| 0° | 1684 | 1684 | 1684 | 1684 |
| 15° | 1438 | 1438 | 1438 | 1438 |
| 30° | 413 | 413 | 413 | 413 |
| 45° | 7 | 7 | 7 | 7 |
| 60° | 3 | 3 | 3 | 3 |
| 75° | 3 | 3 | 3 | 3 |
| 90° | 0 | 0 | 0 | 0 |
| cd / 1000 lm | | | | |

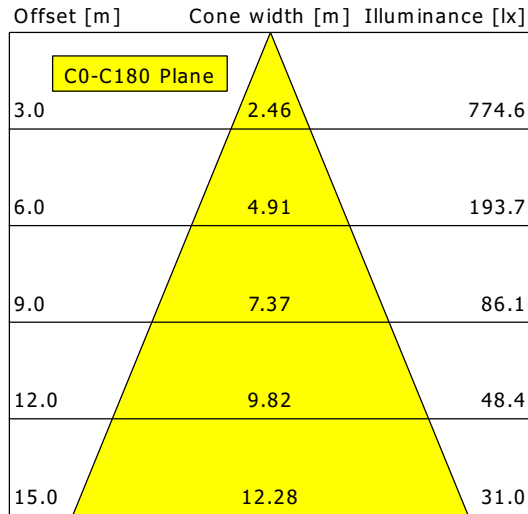

| | |
|--------------------|-------------------|
| η | LED |
| Efficiency | 101 lm/W |
| Direct/Indirect | ↓ 100% / ↑ 0% |
| System Power | 41 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 18.6 |
| UGR C90/C270 | 18.6 |
| CIE Flux Codes | 98 99 100 100 100 |
| Ra/CRI | >80 |