



Connector Location A

Connector Location B

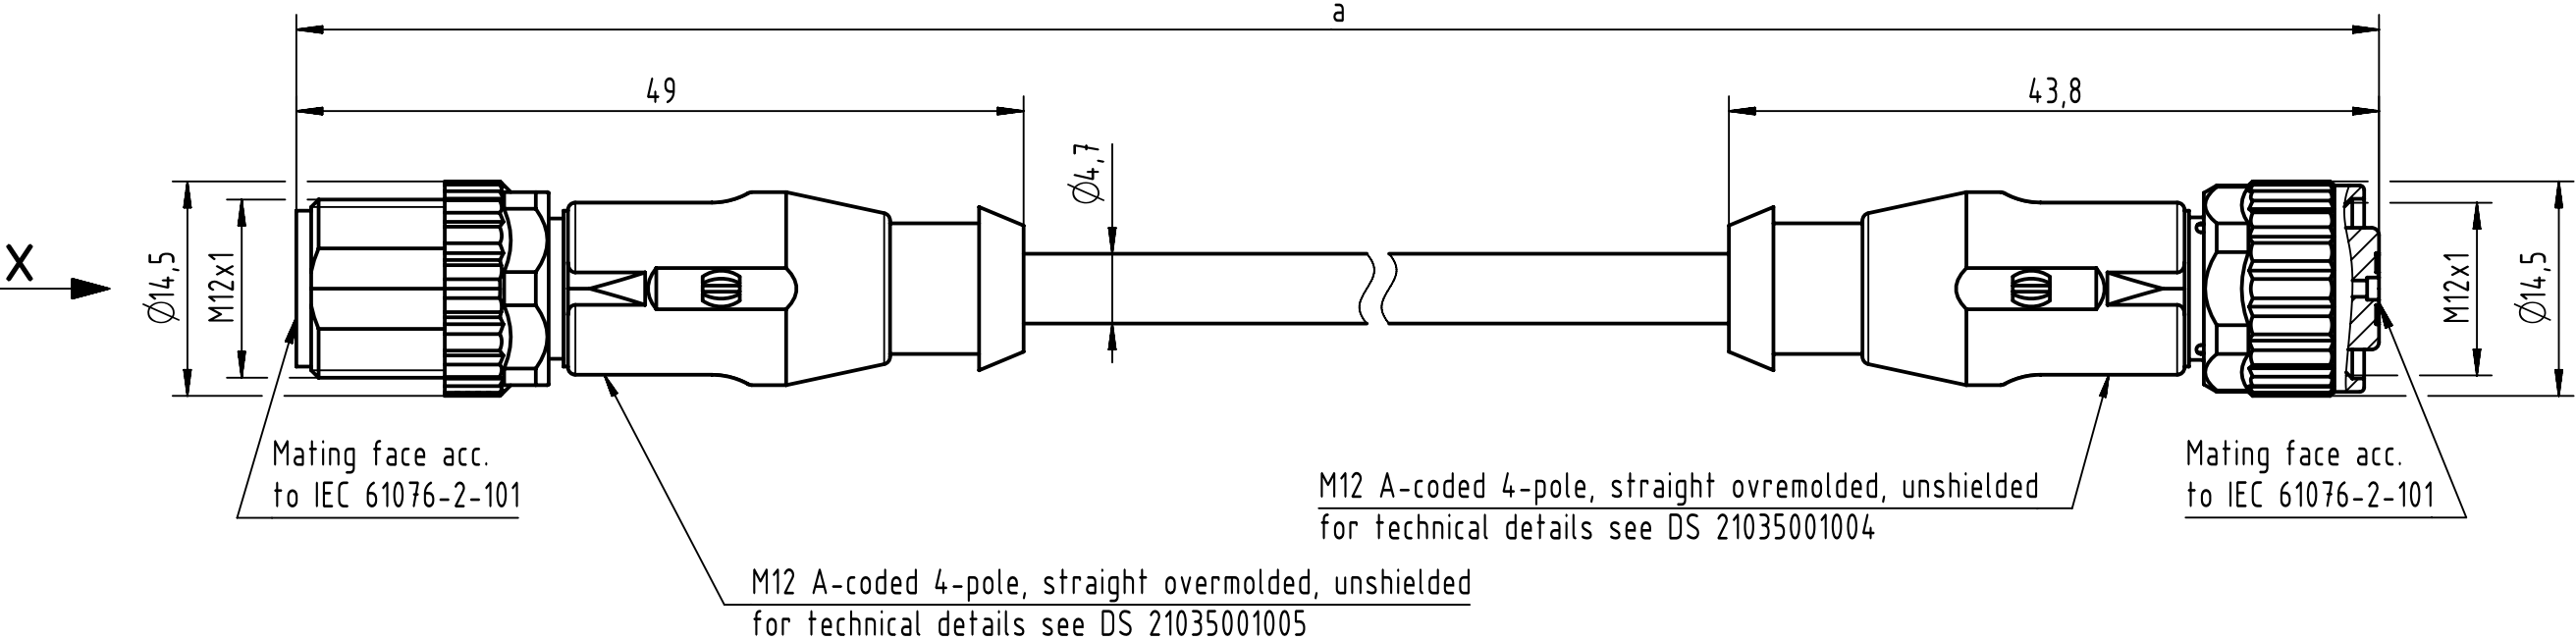



X
male



Loading Plan

- 1 brown 1
- 2 white 2
- 3 blue 3
- 4 black 4

Y
female

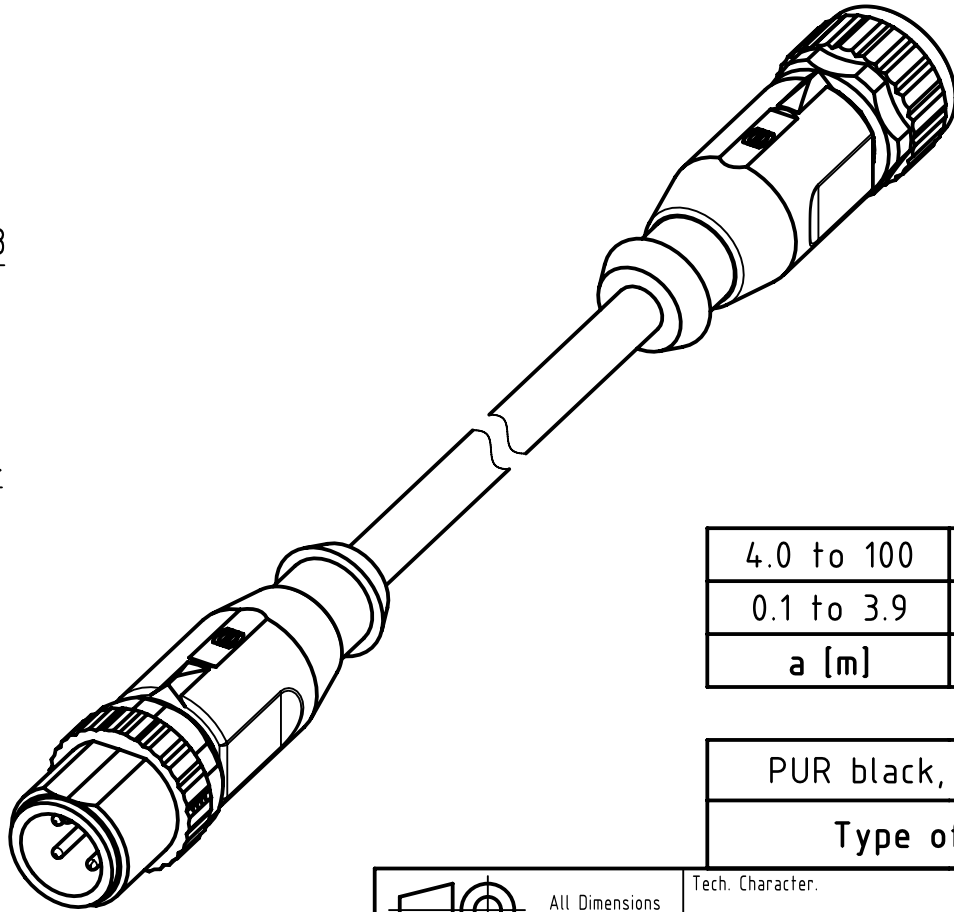

4.0 to 100	±1%
0.1 to 3.9	+0.04
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
Step	0.1	XXX=001
	a [m]	XXX

PUR black, 4x0.34mm ²	21348485491XXX
Type of cable	Part no.

- Protection level: IP65/67
- Temperature range: -25°C ... +80°C

		All rights reserved		Created by COSTEA Costea		Inspected by 402676 Gross		Standardisation MUNTEANV Muntean		Date 2023-05-29		State Final Release	
HARTING Customised Solutions		Department HCS - RO		Title M12 Cable Assembly A-cod st/st m/f		Type TB		Number 21348485491XXX		Rev. B		Page 1/1	
D-32339 Espelkamp													