



ORYO-T 203.930.25/DALI-ST

Oryo 200 | Track-Mounted (1xLED 30W 930/3000K 3150lm 25°)

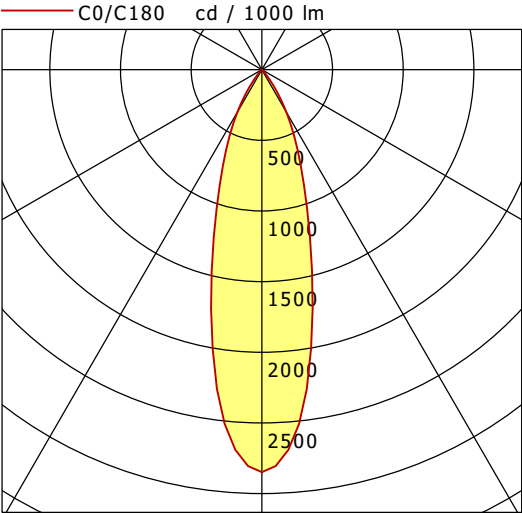

	C0	C90	C180	C270
0°	2848	2848	2848	2848
15°	1347	1347	1347	1347
30°	346	346	346	346
45°	12	12	12	12
60°	7	7	7	7
75°	1	1	1	1
90°	0	0	0	0
cd / 1000 lm				

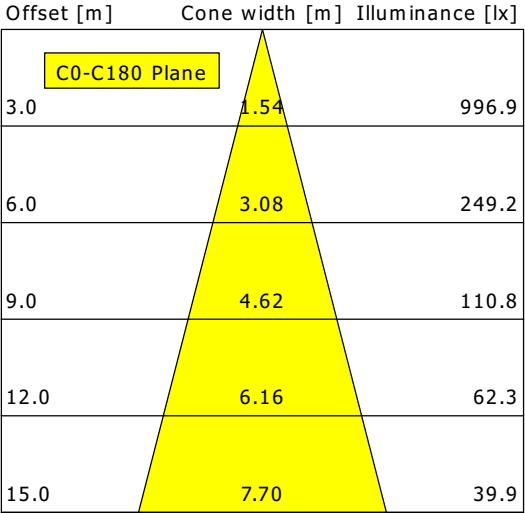

η		LED
Efficiency		105 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		30 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		19.0
UGR C90/C270		19.0
CIE Flux Codes	98 100 100 100 100	
Ra/CRI		>90