


VFCPL 710.20/B

Vario Professional (1xLED 42W BAKERY 4360lm)

— C0/C180 cd / 1000 lm - - - C90/C270

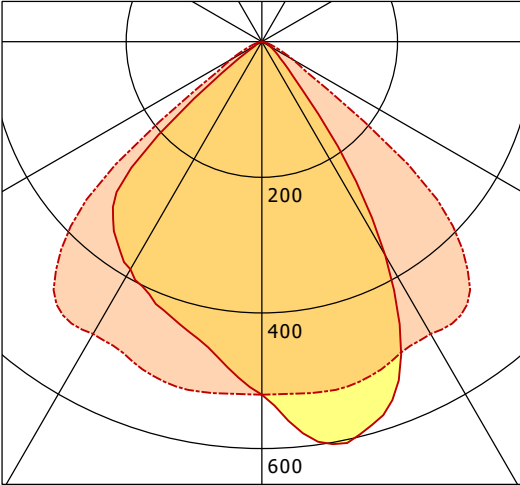

	C0	C90	C180	C270
0°	521	521	521	521
15°	592	523	438	523
30°	364	498	388	498
45°	51	410	291	410
60°	14	53	12	53
75°	4	8	6	8
90°	0	0	0	0
cd / 1000 lm				

LDC unsuitable for cone representation.
Asymmetric LDC.

η Efficiency	LED 104 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	42 W
UGR Reflection factors	X=4H, Y=8H 70/50/20
UGR C0/C180	20.3
UGR C90/C270	27.6
CIE Flux Codes	70 97 100 100 100
Ra/CRI	---